



Peer Stakeholder-Product Validation Review (PS-PVR) for

# GOES-17 EXIS EUVS

## L1b Provisional Maturity

25 September 2019

revised 25 September 2019 17:00

Presenter: Janet Machol - NOAA NCEI and U. Colorado CIRES

### Contributors:

U. of Colorado LASP: F. Eparvier, D. Woodraska, T. Eden, S. Mueller,  
M. Snow, R. Meisner, A. Jones, T. Redick, ....

NCEI/CIRES: S. Codrescu, W. Rowland, and C. Peck

Other: Rodney Viereck, Matt Garhart, ...

# Outline

Quick Summary	3
Instrument and Products Overview	5
Review of Beta Maturity	8
L1b Product Quality	11
• GPA Issues	12
• Post-launch Product Tests (PLPTs)	25
• Instrument Issue: ECI	58
Comparison to Performance Baseline	60
Summary of Remaining Issues	64
Provisional Maturity Assessment	67
Path to Full Validation	72
Auxilliary Information	75

# Quick Summary

- Initial testing using L0 data processed by LASP has provided most cal values.
- GOES-17 behavior is similar to GOES-16 using LASP-processed-L0 data and Ground System OE L1b.
  - No surprises.
  - Studies done with L1b, L2, and LASP-L0-processed data.
  - Solar activity low since launch.
- GPA: many ADRs submitted, many resolved, a few remain.
- Instrument: new LUTs, some issues resolved, a few remain.
- All PLPT tests: **PASSED**
- Provisional Validation Product Maturity Assessment.

Not passed. Need 2 ADRs implemented.  
Request data embargo until data is fixed.

ADR = Algorithm Discrepancy Report

LUT = Look Up Table


# Top Level Evaluation

L1b products	Past Performance	Current Status (after DO 08.01)	Future Outlook
EUVS-A, -B	<ul style="list-style-type: none"> <li>• calibration issues</li> <li>• ADR issues</li> </ul>	<ul style="list-style-type: none"> <li>• improved calibrations</li> <li>• temperature correction ADR needs to be fixed</li> <li>• line irradiance ADR needs to be fixed</li> <li>• other ADRs</li> </ul>	<ul style="list-style-type: none"> <li>• expect remaining issues to be fixed</li> </ul>
EUVS-C	<ul style="list-style-type: none"> <li>• calibration issues</li> <li>• ADR issues</li> </ul>	<ul style="list-style-type: none"> <li>• daily data is high quality</li> <li>• investigating high cadence data difference between GOES-16 and -17</li> </ul>	<ul style="list-style-type: none"> <li>• expect remaining issues to be fixed</li> </ul>
model	<ul style="list-style-type: none"> <li>• major ADR issues</li> </ul>	<ul style="list-style-type: none"> <li>• model improvements will occur (via the LUTs)</li> <li>• unclear if model is working in GPA until other ADRs are fixed</li> </ul>	<ul style="list-style-type: none"> <li>• expect remaining issues to be fixed</li> </ul>

**EXIS**

# EUV and X-Ray Irradiance Sensors (EXIS)



- X-Ray Sensor (XRS)
  - Monitor solar flares
    - Impacts communications and navigation
    - Warning for potential SEP events
- Extreme Ultraviolet Sensor (EUVS)
  - Measures ultraviolet irradiance which impacts upper atmosphere
- Sun Pointing Sensor (SPS)
  - Used for alignment (quad diode, 3.5° FOV)

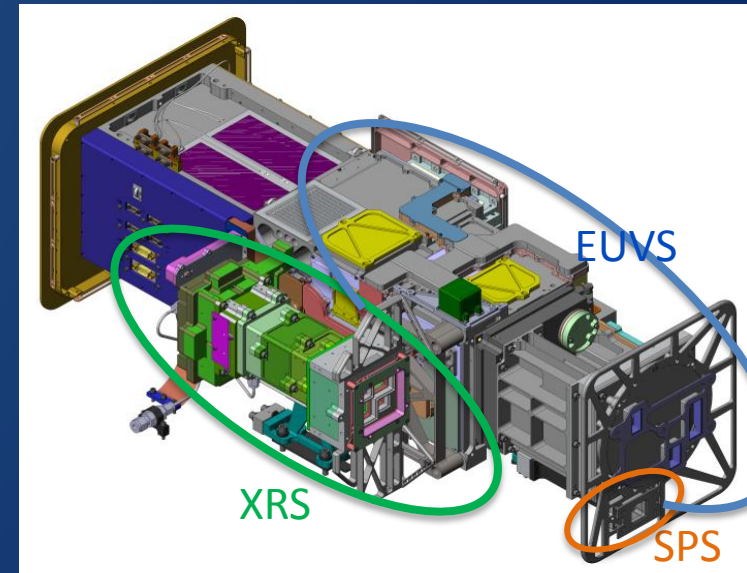

EXIS was designed, built and tested by the Laboratory for Atmospheric and Space Physics (LASP) at the University of Colorado.

# Extreme Ultraviolet Sensor (EUVS)

- Requirements
  - $\leq 30$  s cadence
  - $\leq 20\%$  accuracy
  - Spectral model (5-127 nm)
- 3 Grating Spectrographs
- EUVS-A: 24 diode array, filter wheel
- EUVS-B: 24 diode array
- EUVS-C: 512 diode array
- L1b Products
  - 7 solar lines
  - Mg II index
  - Spectral model (5-127 nm)
  - high res data

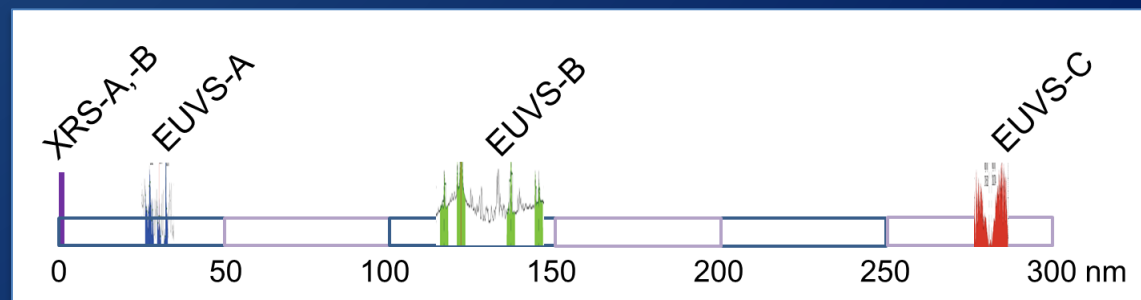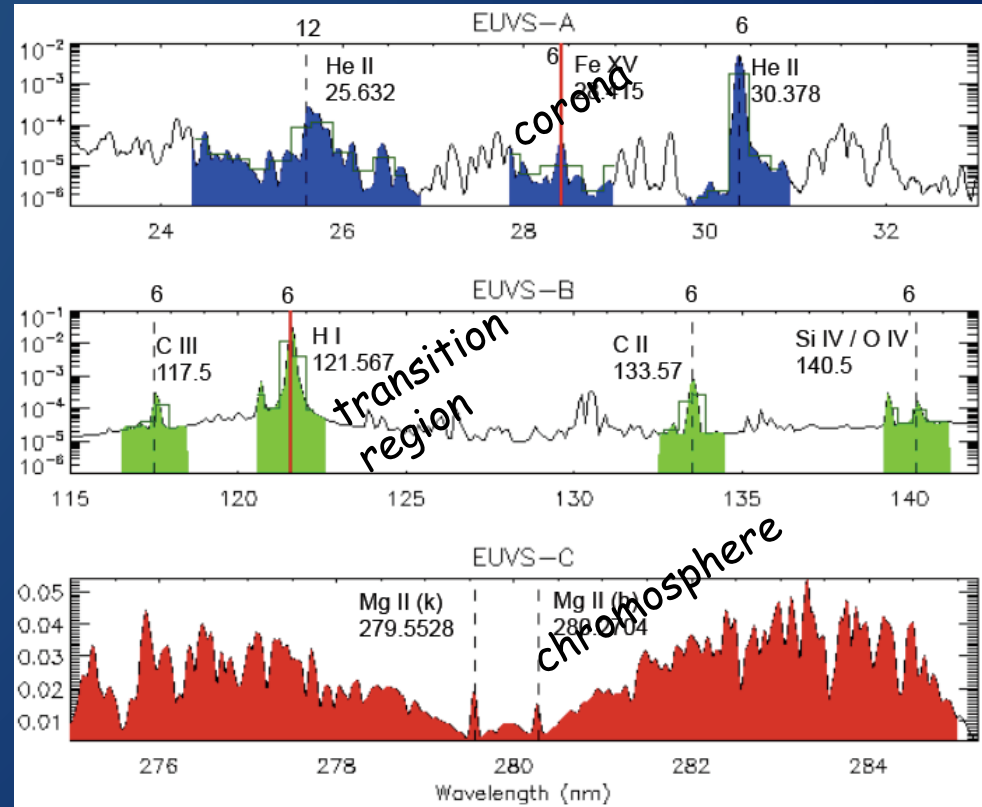

# **REVIEW OF BETA MATURITY**

**BETA REVIEW: 18 JULY 2018**



# EUVS-related GPA Issues at GOES-17 Beta

ADR	Issue	Status	Delivery date
471	EUVS-A, -B dark time dependence	OPEN	DO 08.01
661	EUVS model time-dependent behavior	CLOSED	4/18/2019
679	EUVS model - 117 nm bin	CLOSED	DO 08.00
713	EUVS case flag changes	CLOSED	PR 07.02
715	Remove EUVS daily averages	CLOSED	PR 07.02
453/718	Too many EUVS flags set	CLOSED	DO 06.03
174	EUVS high res data additions to L1b	CLOSED	DO 07.01
267	Identify LUTs that were used	CLOSED	DO 07.00
363	EUVS ADD corrections	CLOSED	DO 07.00
510	SWx data slowdown	OPEN	under investigation by NCEI
536	EXIS underuse of SPS angles	CLOSED	DO 07.01
589	EXIS Rev G LUTs	CLOSED	PR.06.09
625	Add "neglecting leap seconds" to metadata	CLOSED	DO 08.00
397	Fix percent_uncorrectable_L0_errors < 0	CLOSED	not urgent
517	Small but routine L1b gaps, mostly for SEISS	CLOSED	DO.06.03
539	Initialize FM3 and 4 LUTS with bad wavelengths	OPEN	before FM3 launch
605/715	EUVS daily averages - fill values and change long name	CLOSED	PR.07.02
612	Change attributes for alg_container to 'not in use'	CLOSED	DO 08.01
711	Update FM2 OMAS with EUV wavelengths	CLOSED	PR 07.02

# GOES-17 Instrument Issues at Beta to be resolved prior to Provisional Status

Issue	Status	Mitigation
EUVS-C spike removal	OPEN	small impact; not yet implemented
June SDO rocket launch intercomparisons	in progress	improve/validate calibrations
Understand EUVS degradation	CLOSED	routine calibrations are used
EUVS irradiance model coefficients	CLOSED	coefficients have been determined
EUVS eclipse recovery	OPEN	ADR 898 EUVS dark current temperature correction
Comparisons of L0 to L1b	ongoing	

# L1B PRODUCT QUALITY ASSESSMENT


# GPA Issues for Provisional Validation

- >70 EUVS-related ADRs have been closed since 2016.
- Analysis with Ground System OE and ITE L1b data and LASP processed L0-data.
- Two examples of ADRs fixed in DO 08.01
  - ADR 840 EUVS CaseNumbers set incorrectly
  - ADR 857 EUVS Negative Currents
- Two GPA issues that should have been fixed by Provisional Validation
  - ADR 898 temperature correction
  - ADR 471 EUVS-A and -B time dependence of darks

# Fixed ADR Example: ADR 840

ADR 840: EUVS case numbers set incorrectly. (fixed DO 08.01)

- EUVS case number defines which inputs model should use.
- Daily and weekly calibrations were not flagged and ended up in running daily averages in model irradiances.

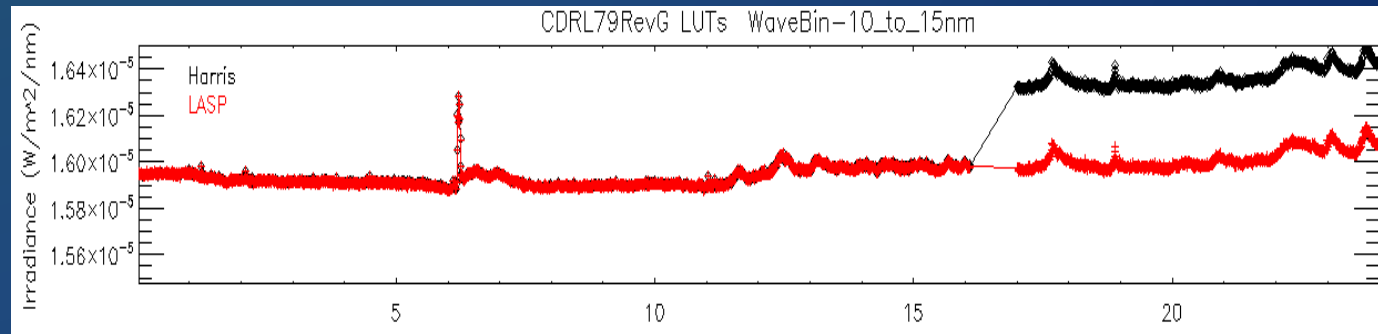


Credit: Don Woodraska

Correction: If `euvs_md == CAL` or `euvs_md == DIAG`,  
then set `EUV_CaseNumber = 8` (bad).

# Fixed ADR Example: ADR 857

ADR 857: Include EUVS negative currents. (fixed DO 08.01)

- EUVS currents  $< 0$  were being set to 0.
- Negative currents should be included to avoid biasing data high. (Same issue occurred with XRS.)

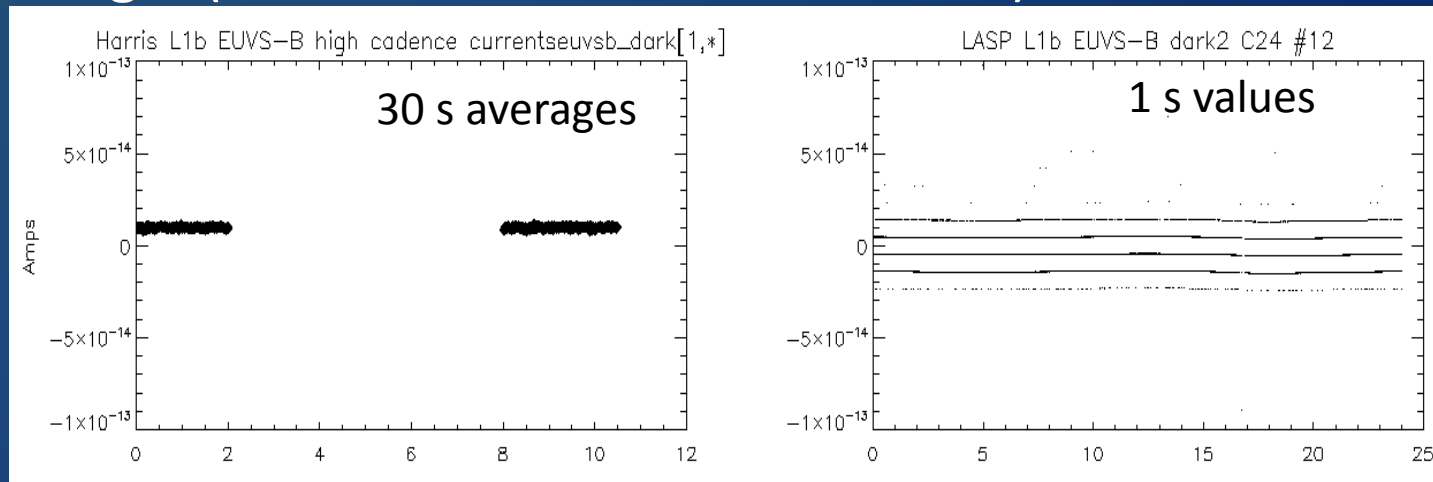


Credit: Don Woodraska


**Correction: Do not set negative currents to 0.**

# ADR 471: EUVS dark count correction


- Original Request: Add time-dependent correction to dark counts.
- Several iterations.
- DO 08.01 fix
  - Remove double-count 30.4 and 121.6 nm split diodes and use double precision.
- Remaining issue: 6% offset in 121.6 nm line

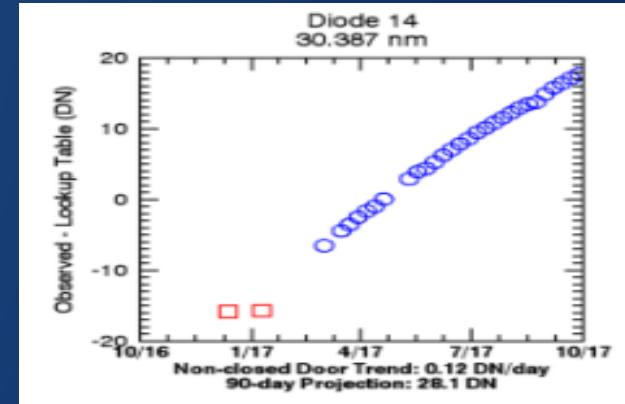

dark count trend over 6 months



diodes for 121.6 nm line

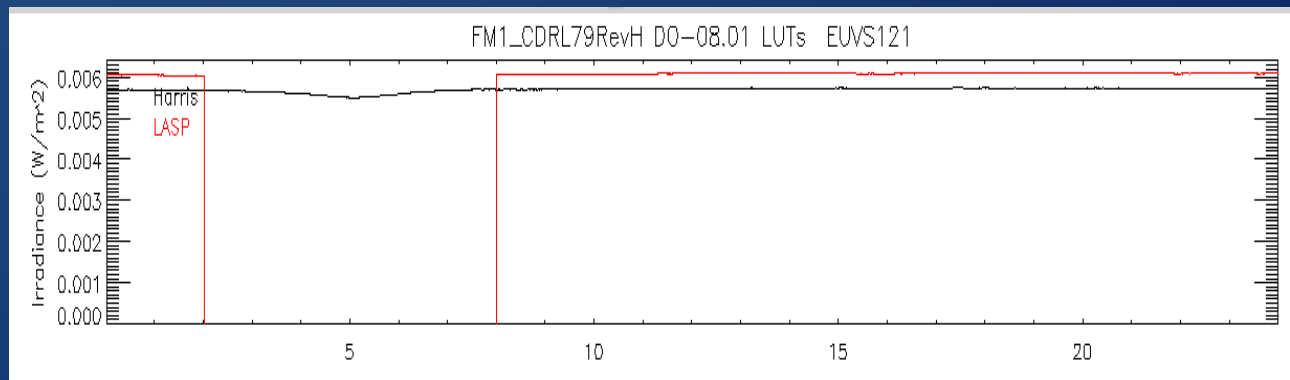

These GOES-16 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.


# ADR 898: Dark Counts Temperature Correction (1/9)

- Major offsets to EUVS irradiances require a revised temperature correction to the dark counts.
- Determined from looking at long term trends.
- Software fix
  - an equation change
  - simplification of LUTs from 24 MB table to 2 variables



# Error without Temperature Correction (2/9)

*Variability from error > solar variability*

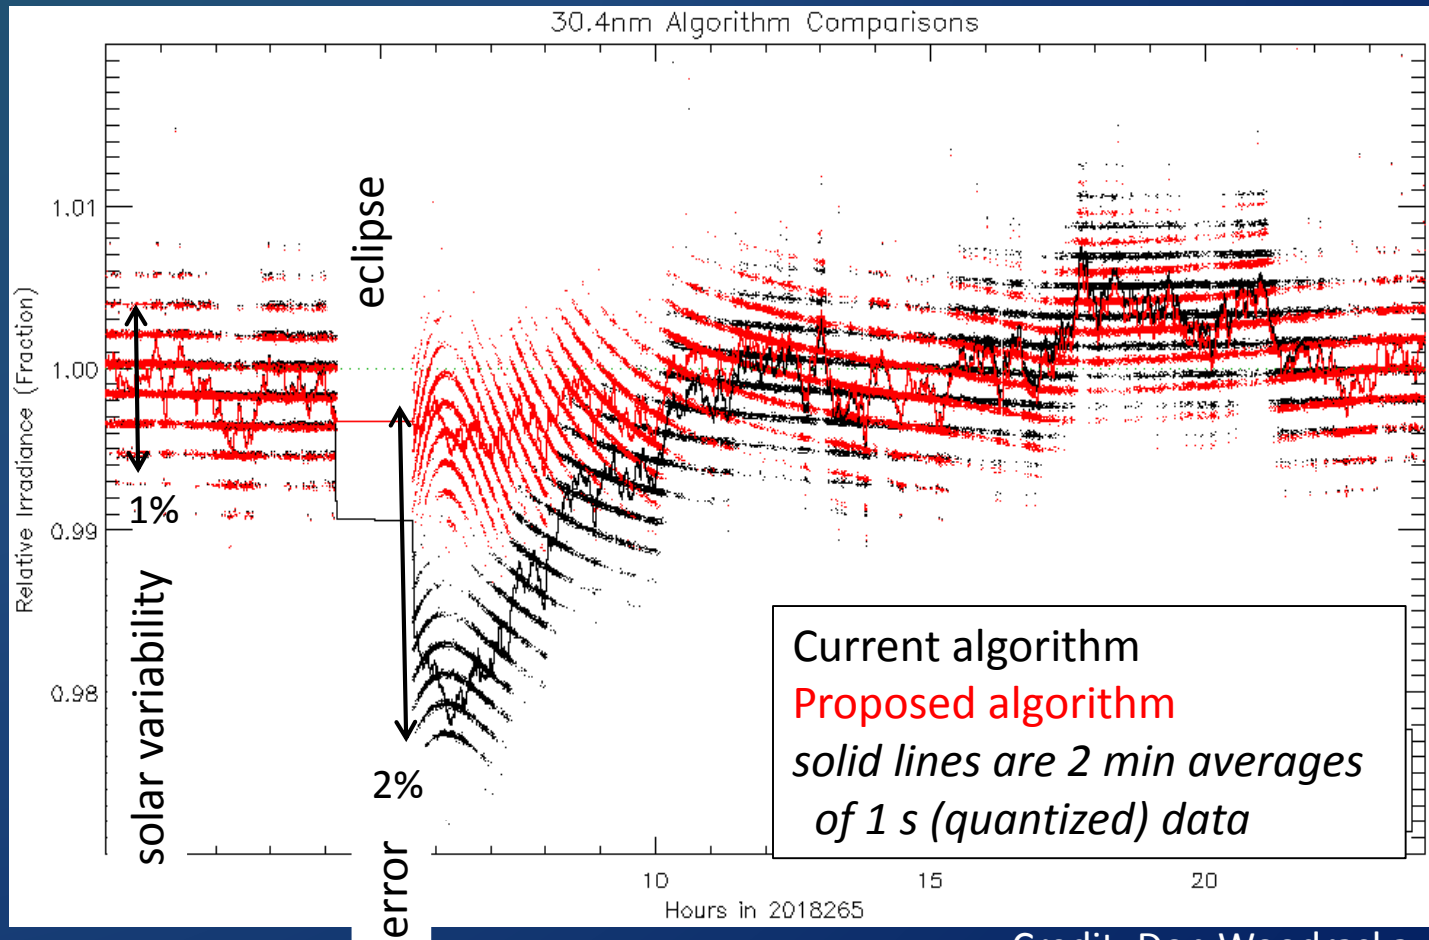

Credit: Don Woodraska

These GOES-16 data are preliminary, non-operational data and are undergoing testing.  
Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# Why measure EUV variability? (3/9)

Variations in solar EUV by up to a factor of 10 increase have major impacts.

More EUV irradiance heats the thermosphere more.

A warmer atmosphere expands.

Satellite drag can increase by a factor of 10.

Satellite operators must correct orbit calculations.

More EUV irradiance modifies the ionosphere.

Impacts radio communications and GPS navigation.


# EUV variability needed for drag model (4/9)

- Space Environment Technologies (SET) uses EUV to form solar indices.
  - Currently uses GOES 14/15 EUV bands.
  - Will switch to GOES-R EUVS lines\* and Mg II.
- High Accuracy Satellite Drag Model (HASDM)
  - Uses these indices as inputs.
  - Run by the USAF.
  - The output used to revise NORAD catalogue of satellite 2 line elements every 8 hours.

\* 28.4, 30.4 and 121.6 nm

# How big are temperature changes? (5/9)

- Weekly dark observations show temperature changes.
- Use error with heater adjust to estimate seasonal error.

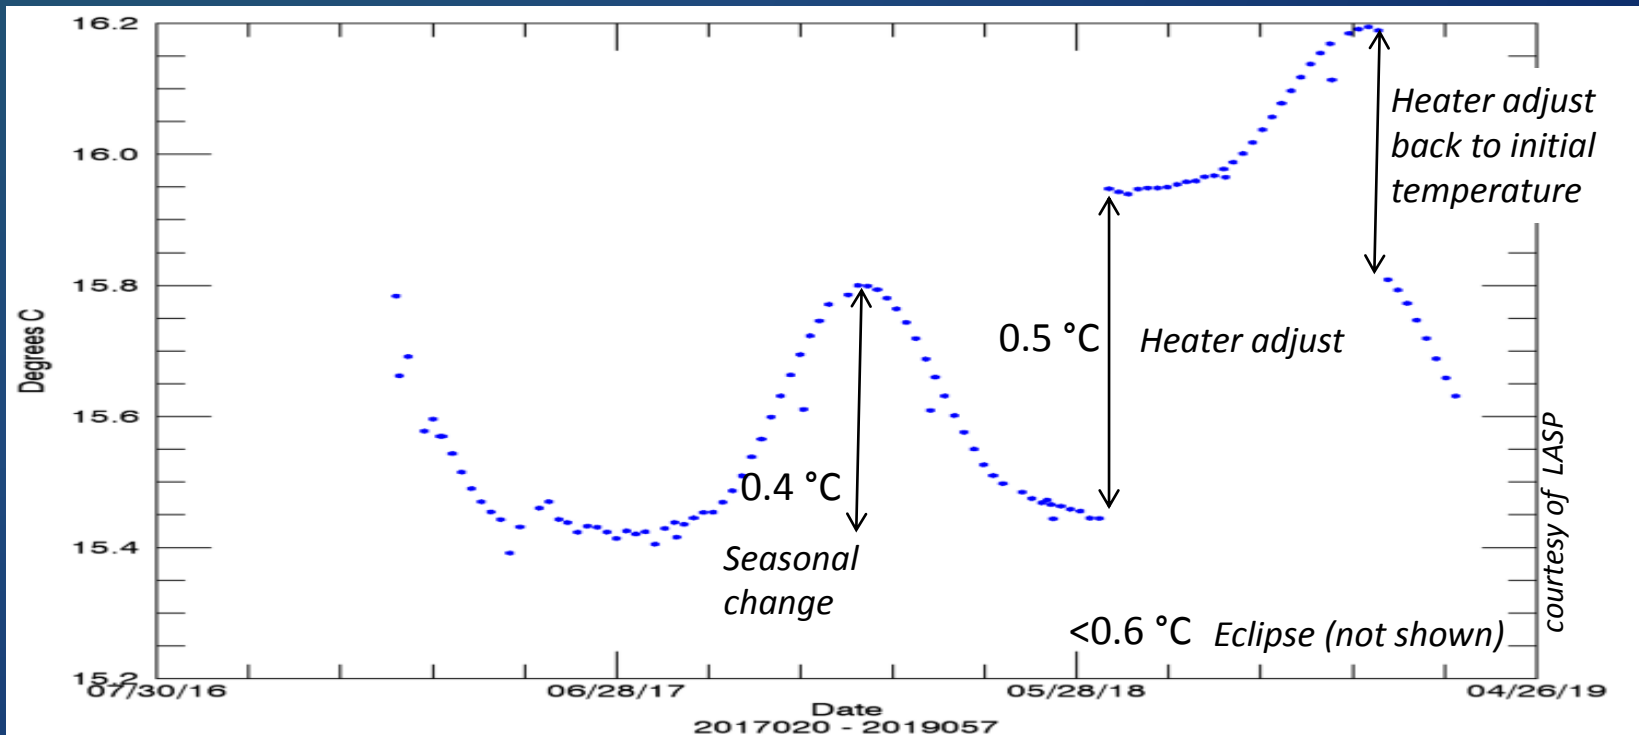



These GOES-16 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# Impact of temperature changes (6/9)


Daily variability at 30.4 nm: 1%  
 $\Delta T$  adjust= 0.5 °C  
has a 1.6% irradiance change

$\Delta T$  seasonal = 0.4 °C  
→ 1.3% seasonal change  
→ *Seasonal temperature error comparable to daily variability*

Eclipse irradiance change = 2%.  
→ *Eclipse impact is twice as large as daily variability and lasts >6 hours.*

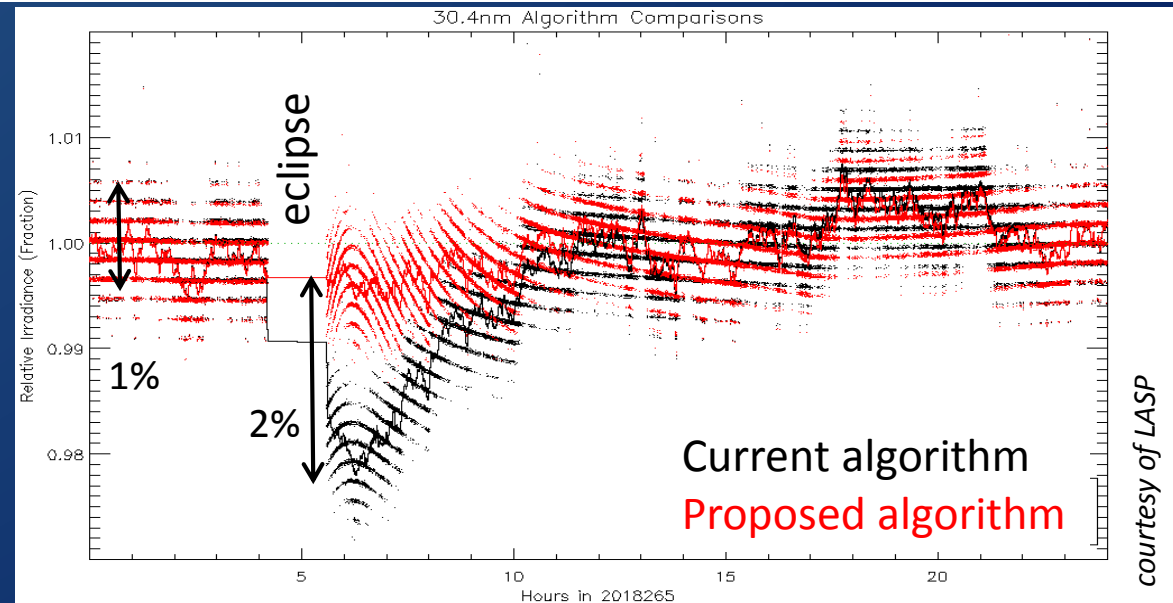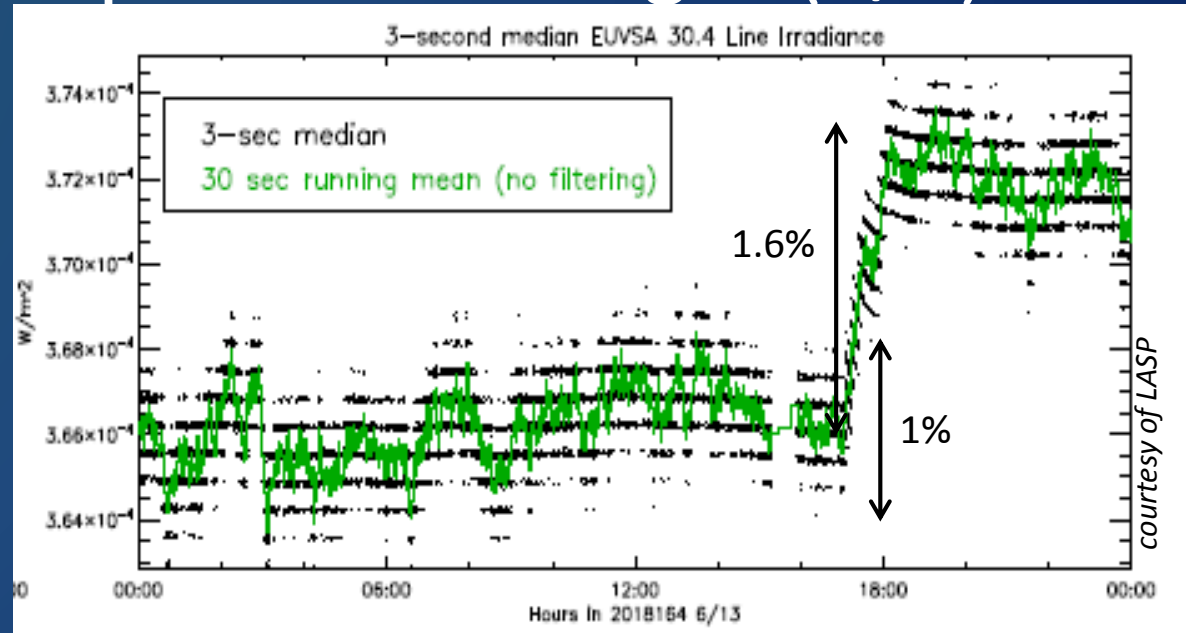

# EUVS Accuracy Requirements (7/9)

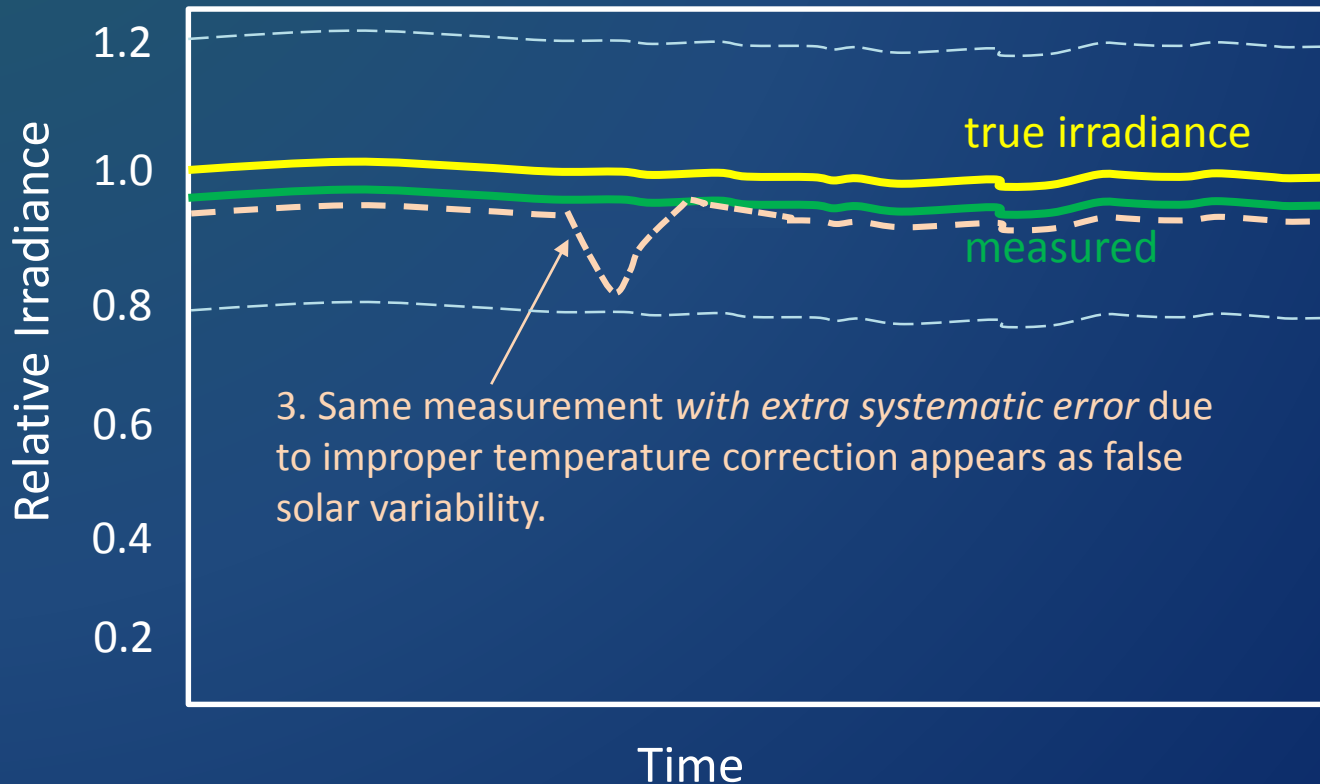

1. PORD  $\pm 20\%$  allowed systematic error

2. Measured error which maintains true solar variability.

3. Same measurement *with extra systematic error* due to improper temperature correction appears as false solar variability.

Bias or Systematic Errors: Offset errors that remains with repeated measurements. Systematic errors can be reduced through calibration.  
Random, Stochastic or Precision Errors: Random-like values about the mean value. (not shown in cartoon)

# EUVS Accuracy Requirements (8/9)

- PORD accuracy requirement for EUVS is 20%.
- Intended to refer to the uncertainty (bias) in the absolute long term accuracy of the calibration.
- Not intended to cover other systematic errors that impact variability.
  - Example: if the true daily variability is only 1%, then irradiances with systematic errors that cause 7% variation are meaningless.

ID	Requirement
EXISPORD122 EXISPORD123	<b>Irradiance Product Accuracy</b> The accuracy of the EUV irradiance products, at the spectral resolutions given in EXISPORD107 and the cadence given in EXISPORD130, <b>shall</b> be within 20%, 1-sigma, of the actual irradiance.

# Temperature correction (9/9)

*Without ADR correction, the errors due to eclipse or seasonal variability range from 0.5 to 7 times the daily solar variability.*

## *Approximate impacts of corrections*

wavelength [nm]	post-eclipse error/total irradiance	daily solar variability	post-eclipse error/daily variability	seasonal error/daily variability	effectiveness of ADR 898 correction	used for HASDM
25.6	2%	2%	1	0.6	very good	
28.4	4%	5%	0.8	0.5	very good	yes
30.4	2%	1%	2	1.3	very good	yes
117.5	5%	2%	2.5	1.6	half of error remains	
121.6	0.5%?	0.5%	1?	0.6	uncertain	yes
133.5	7%	1%	7	4.6	good	
140.5	1%	1.5%	0.7	0.4	small improvement	



# Post-Launch Product Tests

Test Plans and Procedures are from the RIMP\*.

PLPT	Test Title	Operator	Status	Criteria
01	EUVS-C Mg II Scaling	LASP	Pass	[1]
02	EUVS L1b Model Baseline	LASP	Pass	[1]
03	EUVS L1b Uncertainties	LASP	Pass	[1]
04	EUVS Bootstrap Degradation; Mg II -to- 117.5/133.5	LASP	Pass	[1]
05	EUVS Bootstrap Degradation; 117.5/133.5 -121.6/140.5	LASP	Pass	[1]
06	EUVS Bootstrap Degradation; 121.6/140.5 -to- 25.6/30.4	LASP	Pass	[1]
07	EUVS Bootstrap Degradation; 25.6/30.4 -to- 28.4	LASP	Pass	[1]
14	XRS/EUVS/Mg II Inter-Satellite Comparisons (L1b)	LASP, NCEI	Pass	none


[1] RIMP Provisional Success Criteria: "EUVS L1b product data are available and analysis is completed."

- Most PLPT tests use LASP-processed L0 data.
  - PLPTs for calibrations need unprocessed data.
  - Allows use of early data for trending where GPA was incorrect initially or high resolution data was not available.
  - Allows comparisons of current data where GPA is incorrect.
- Ground System OE L1b data used for considerable ADR testing and some PLPT 14 results.

# #1: EUVS-C Mg II Scaling (1/6)

- **Objective:** Determine the NOAA Mg II scaling factors needed for historical continuity.
- **Provisional Success Criteria:** EUVS L1b product data are available and analysis is completed.
- Scaling is to a standard spectral resolution as described in:
  - A Revised Magnesium II core-to-wing ratio from SORCE SOLSTICE, M. Snow, et al., Earth and Space Sciences, (accepted).
- **New factors:**  $MgII_{\text{standard}} = a + b \cdot MgII_{\text{EXIS}}$ 
  - GOES 16:  $a = 0.19052770$      $b = 0.23545029$
  - GOES-17:  $a = 0.20745769$      $b = 0.17505354$
- LUT implementation will occur soon.


# #1: EUVS-C Mg II Scaling (2/6)

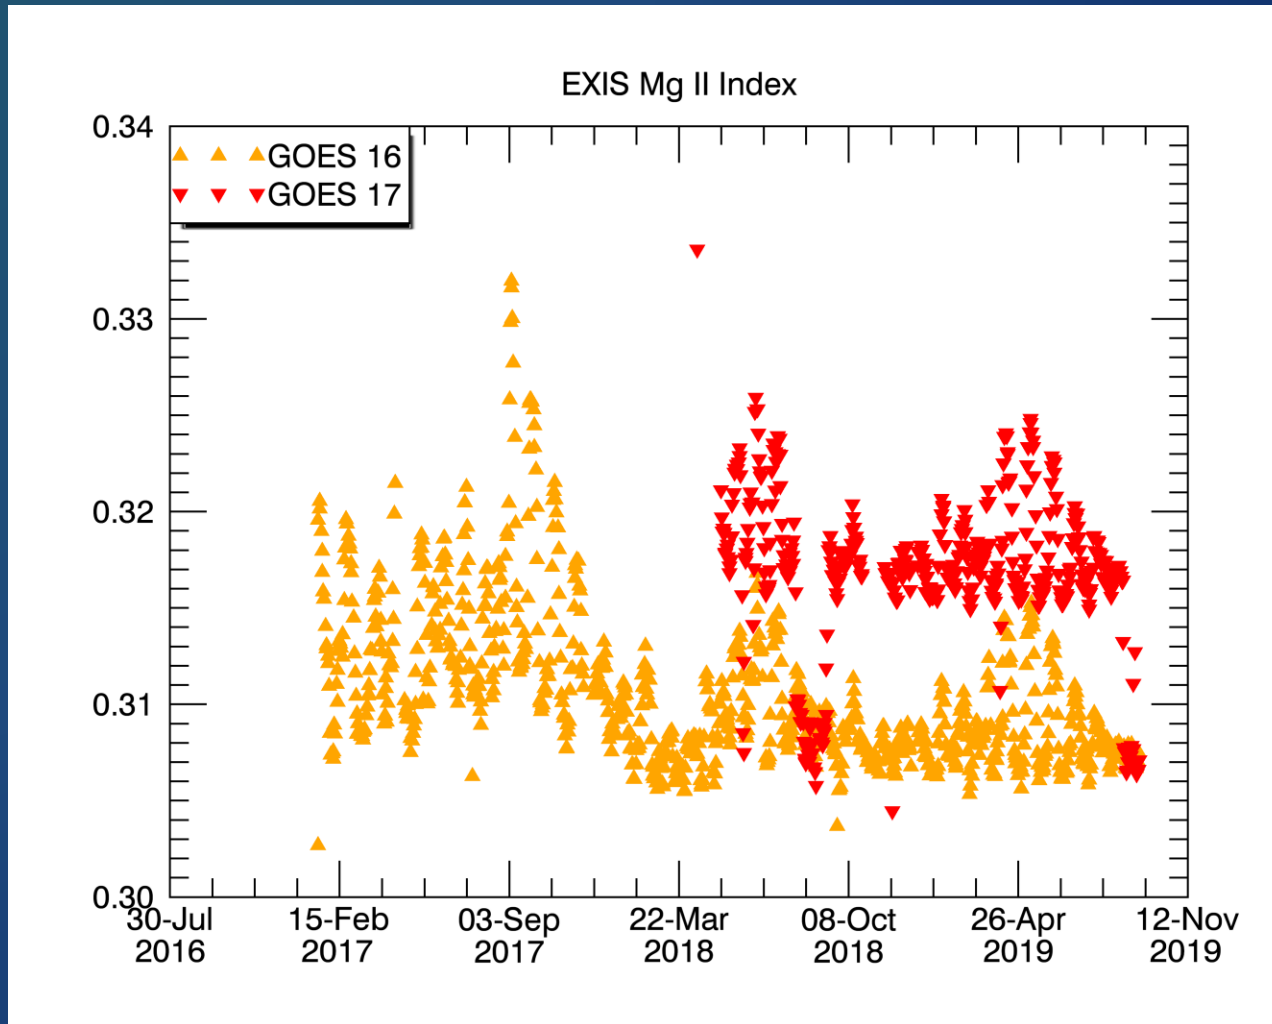


These GOES-16 and 17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #1: EUVS-C Mg II Scaling (3/6)

ratio of  
unscaled  
 $MgII_{EXIS}$

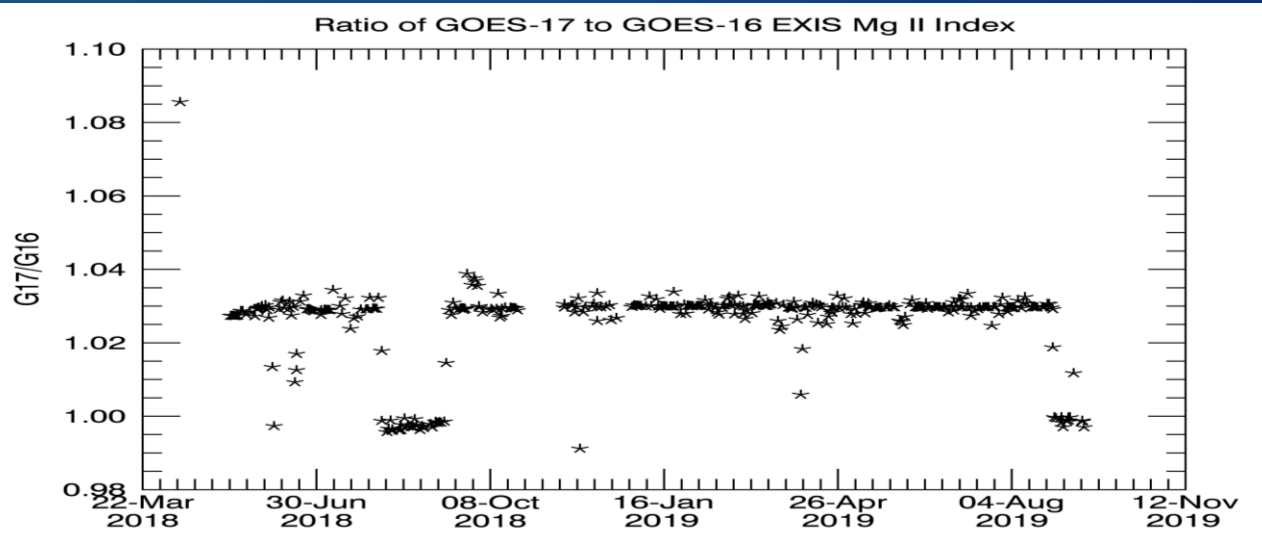


ratio of  
scaled  
 $MgII_{standard}$

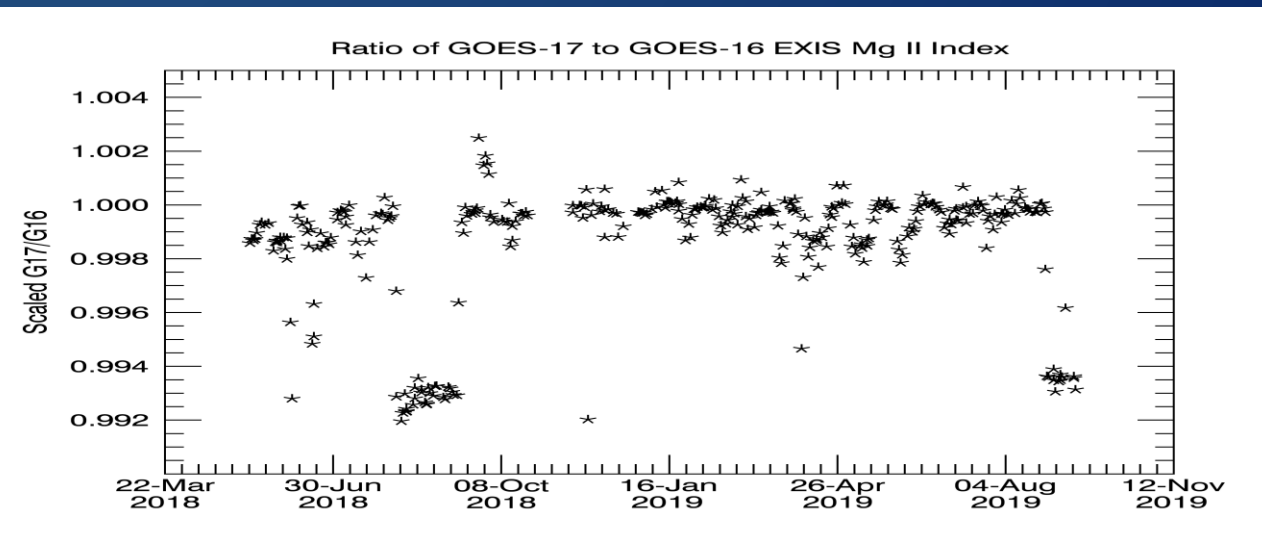


These GOES-16 and 17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #1: EUVS-C Mg II Scaling (4/6)

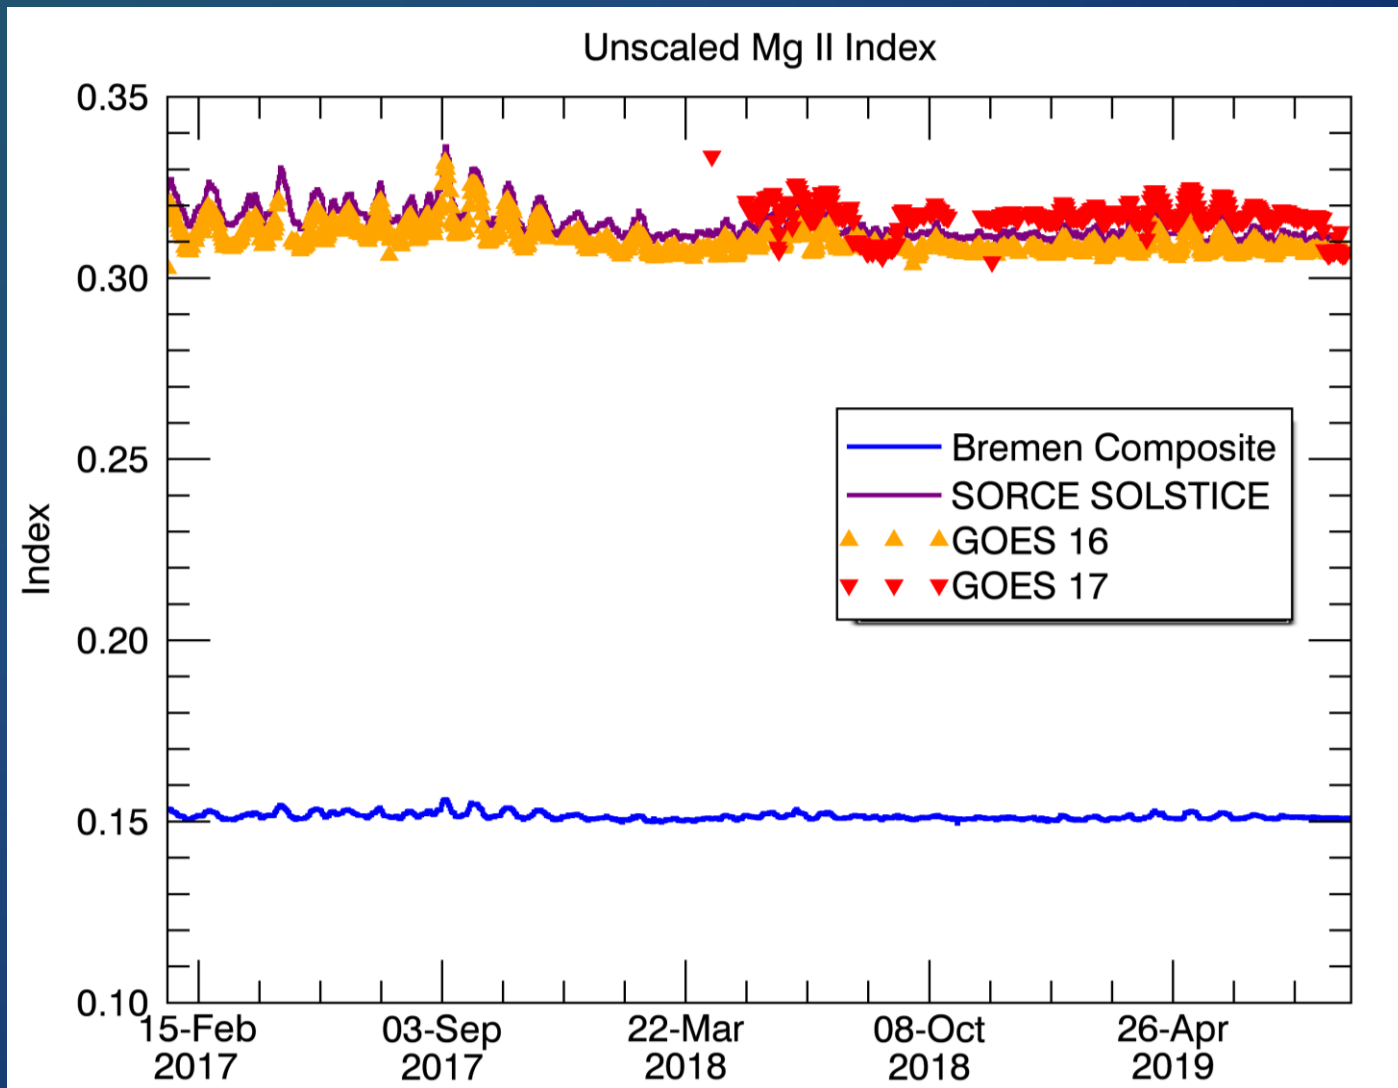


These GOES-16 and 17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #1: EUVS-C Mg II Scaling (5/6)

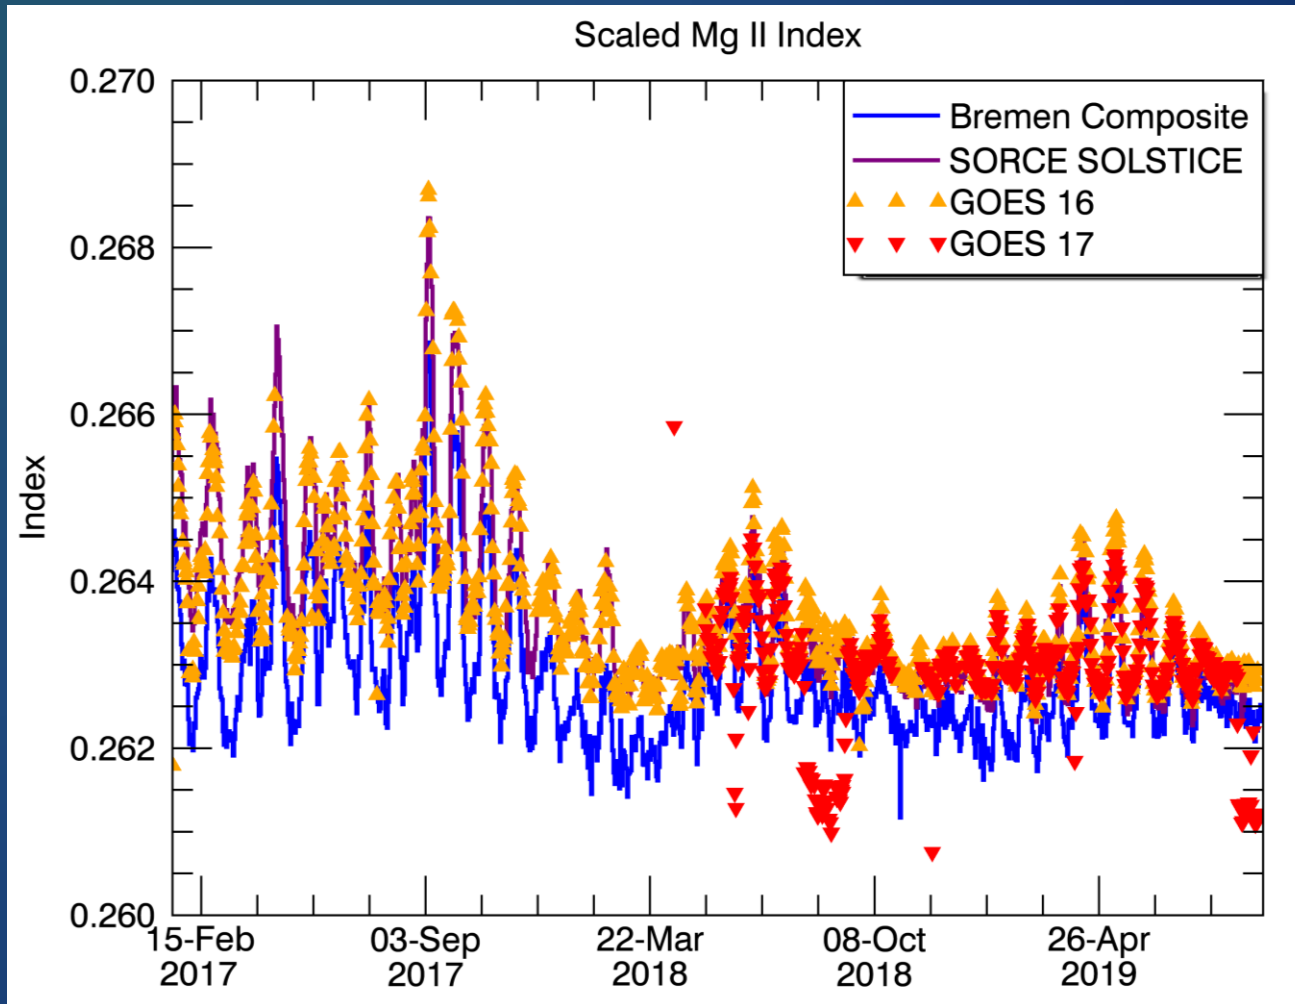

These GOES-16 and 17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #1: EUVS-C Mg II Scaling (6/6)

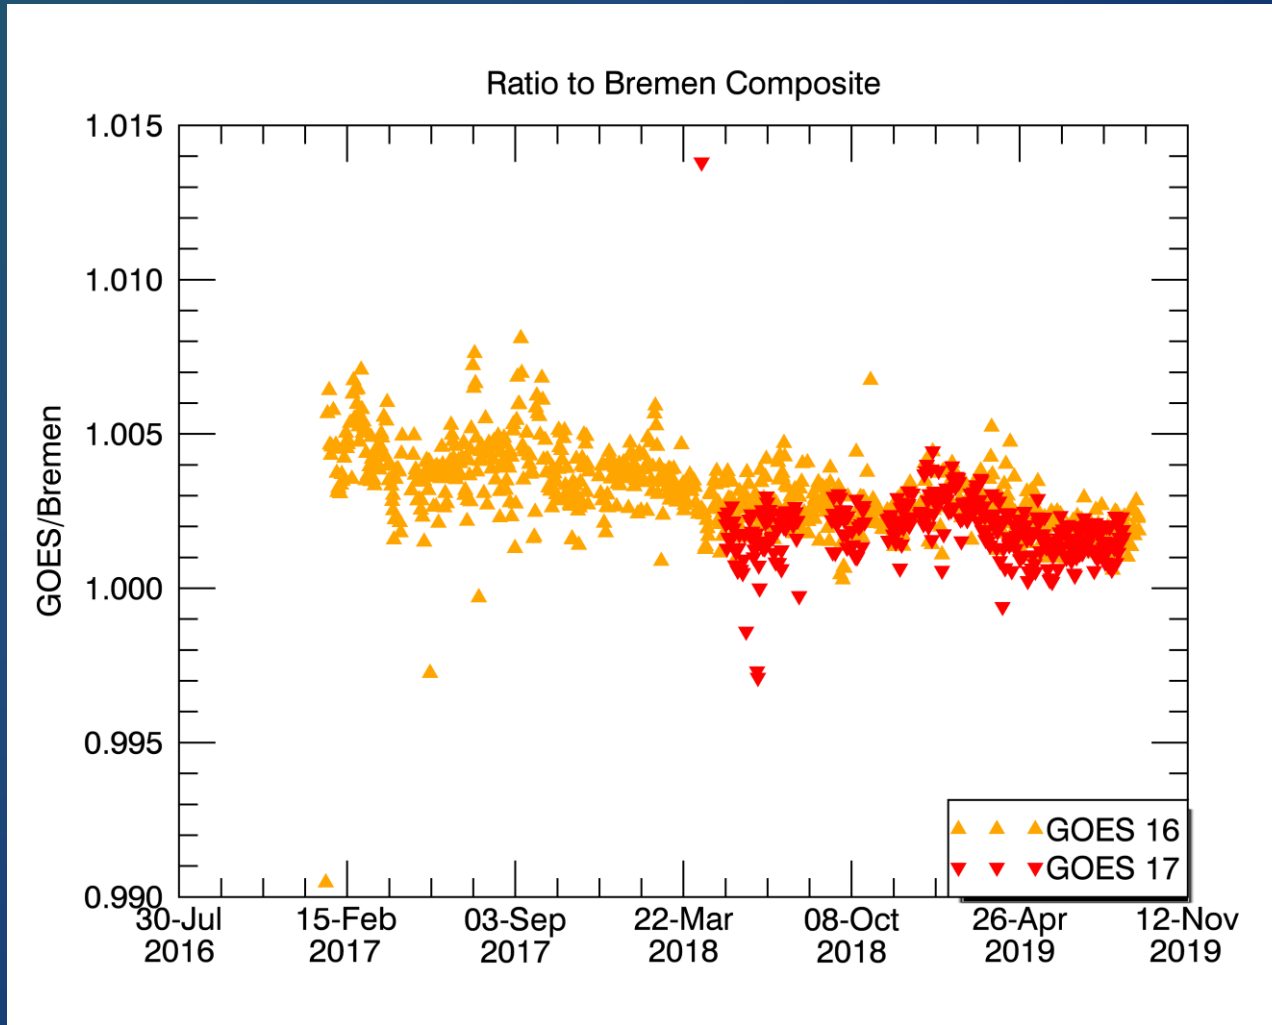

These GOES-16 and 17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.


## #2: EUVS L1b Model Baseline (1/2)

- **Objective:** Determine if coefficient parameter updates are needed for the EUVS proxy model.
- **Provisional Success Criteria:** EUVS L1b product data are available and analysis is completed.
- The GOES-R EUVS Model for EUV Irradiance Variability, E.M.B. Thiemann, et al., J. Space Weather and Space Climate (in review).
  - Discusses 7 training data sets, cross-calibration.
  - Paper provides correlation coefficients.
  - Coefficients will be available from NCEI website.
- LUTs not yet updated in order to test ADR 471.



# #2: EUVS L1b Model Baseline (1/2)

Example: Comparison of EUVS model and data. (Figure from paper.)

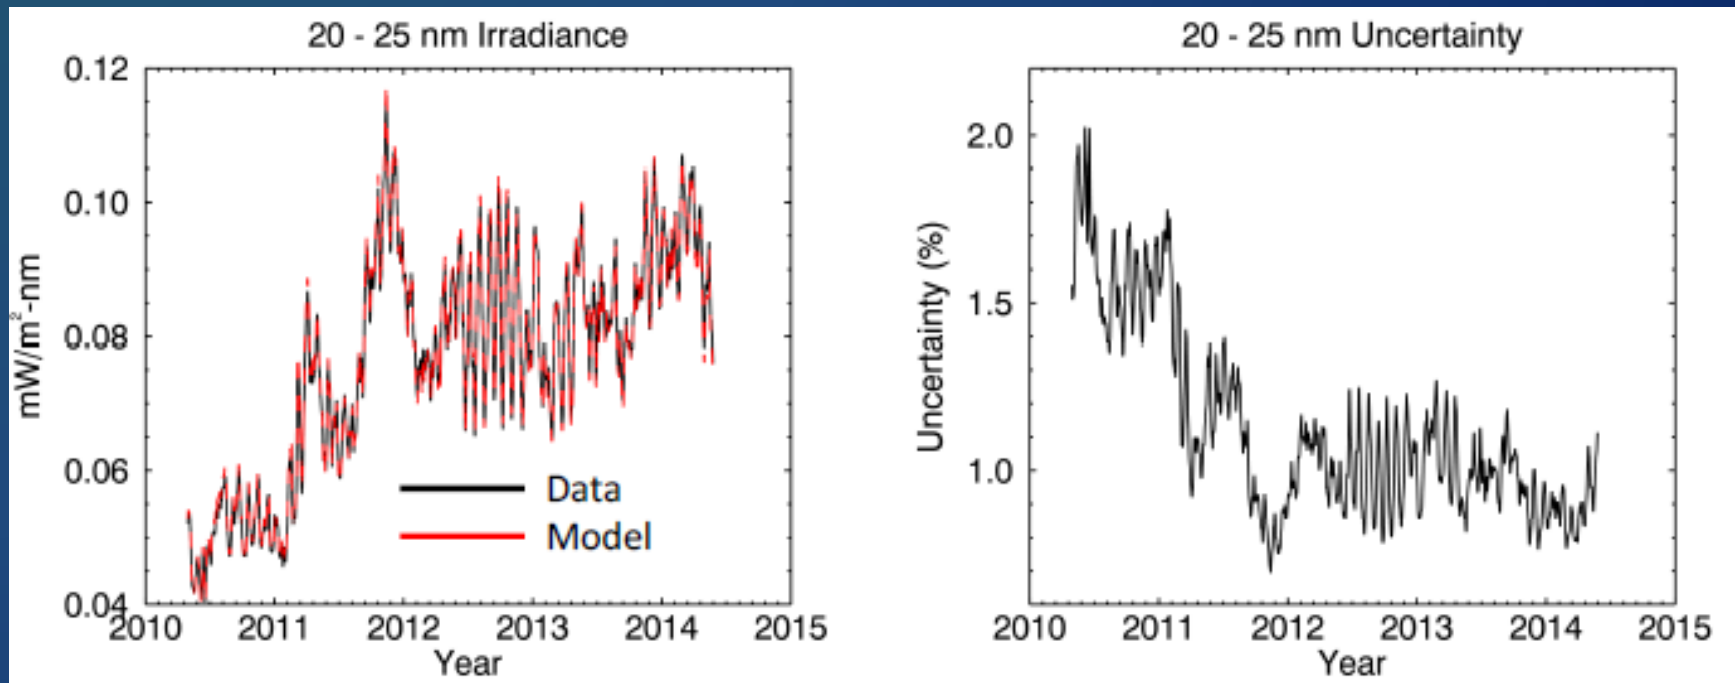

from Thiemann, et al., (in review)

# #3: EUVS L1b Uncertainties (1/4)

- **Objective:** Determine the uncertainties in the EUVS level 1b irradiances.
- **Provisional Success Criteria:** EUVS L1b product data are available and analysis is completed.
- Uncertainties due to statistical errors were calculated for three different days using L0 data, with varied levels of solar activity.
- No systematic errors were included.
- Errors due to temperature effects will be discussed later.
- Main results for GOES-17 at 1-s cadence:
  - 25.6 nm:  $5.7\% < \sigma_E/E < 13.6\%$
  - 28.4 nm:  $11\% < \sigma_E/E < 26\%$
  - 30.4 nm:  $\sigma_E/E \approx 3.4\%$
  - 117 nm:  $6.6\% < \sigma_E/E < 8.9\%$
  - 121 nm:  $\sigma_E/E \approx 3.1\%$
  - 133 nm:  $5.3\% < \sigma_E/E < 5.5\%$
  - 140 nm:  $4.9\% < \sigma_E/E < 7.2\%$

*Note: For 30-s uncertainties, divide these values by  $\sqrt{30} = 5.48$ .*

# Uncertainty Calculation (2/4)

**Diode Current:**  $C = \frac{g(S - S_0)}{\Delta t}$

$g$  = Diode gain (fC/DN)  
 $S$  = Diode signal (DN)  
 $S_0$  = Diode dark signal (DN)  
 $\Delta t$  = Integration time (sec)

**Error Propagation:**  $\sigma_C^2 = \left(\frac{\partial C}{\partial g} \varepsilon_g\right)^2 + \left(\frac{\partial C}{\partial S} \sigma_S\right)^2 + \left(\frac{\partial C}{\partial S_0} \sigma_{S_0}\right)^2 + \left(\frac{\partial C}{\partial \Delta t} \sigma_{\Delta t}\right)^2$

**Relative Uncertainty:**  $\frac{\sigma_C}{C} = \left[ \left(\frac{\sigma_g}{g}\right)^2 + \left(\frac{\sigma_S}{S - S_0}\right)^2 + \left(\frac{\sigma_{S_0}}{S - S_0}\right)^2 + \left(\frac{\sigma_{\Delta t}}{\Delta t}\right)^2 \right]^{1/2}$




---

**Irradiance:**  $E = \frac{C}{R}$

$C$  = Diode Current (Amps)  
 $R$  = Diode Responsivity (Amps m<sup>2</sup> W<sup>-1</sup>)

**Relative Uncertainty:**  $\frac{\sigma_E}{E} = \left[ \left(\frac{\sigma_C}{C}\right)^2 + \left(\frac{\sigma_R}{R}\right)^2 \right]^{1/2}$





# Uncertainty for EUVS-A (3/4)

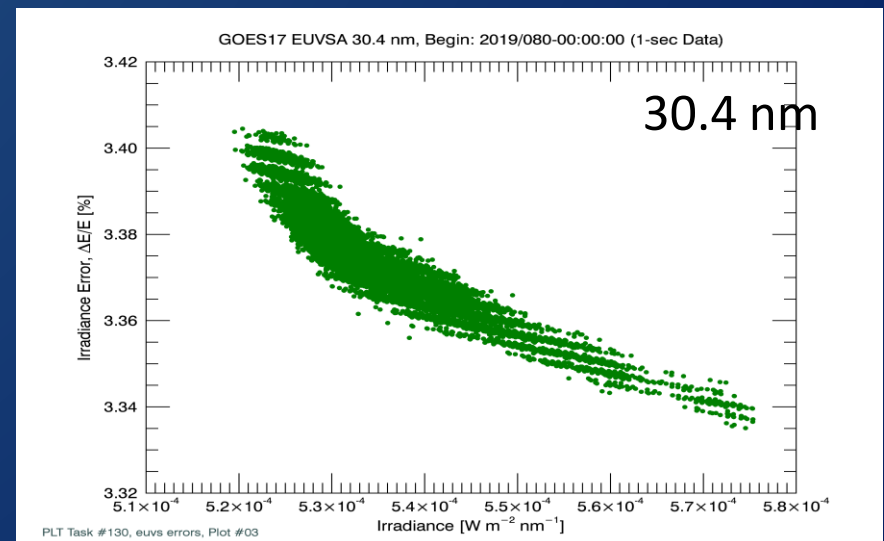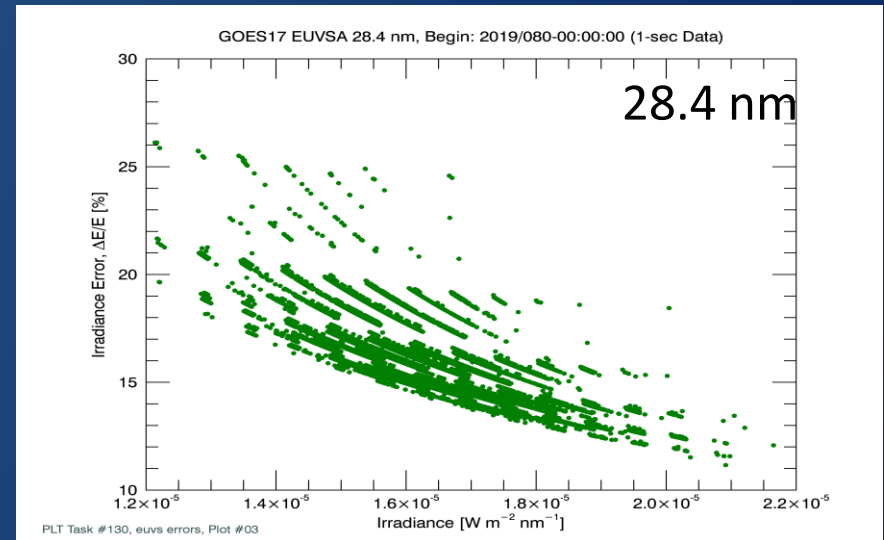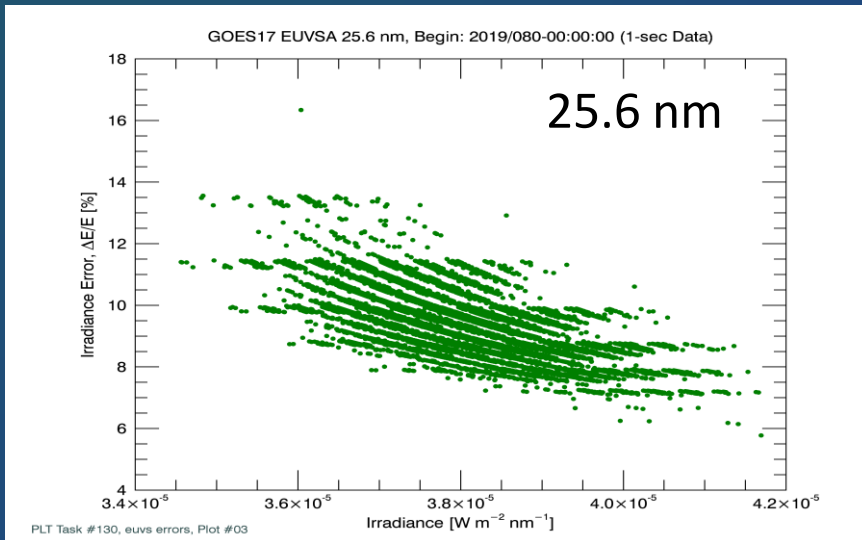

Note: Vertical offsets are because data was taken during eclipse season with incompletely corrected backgrounds.

These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# Uncertainty for EUVS-B (4/4)

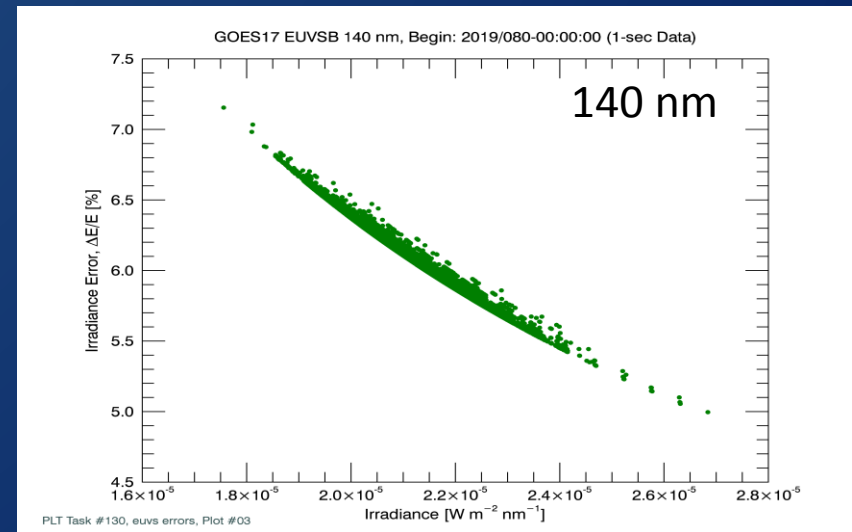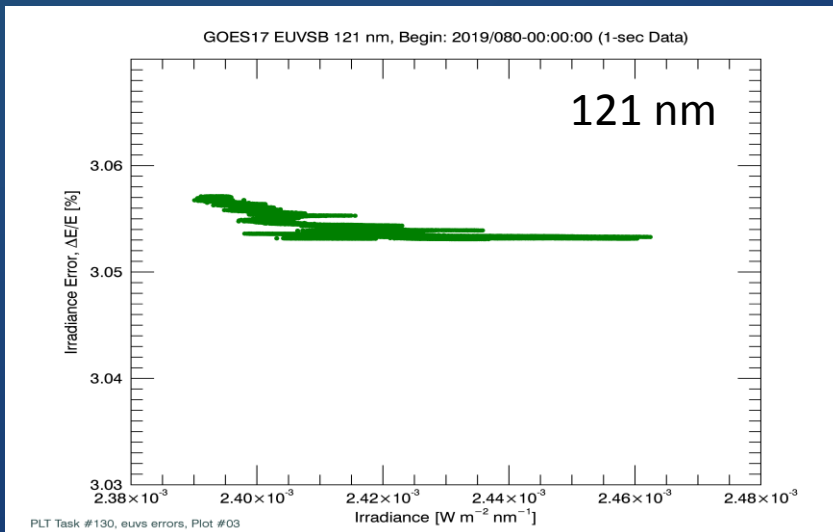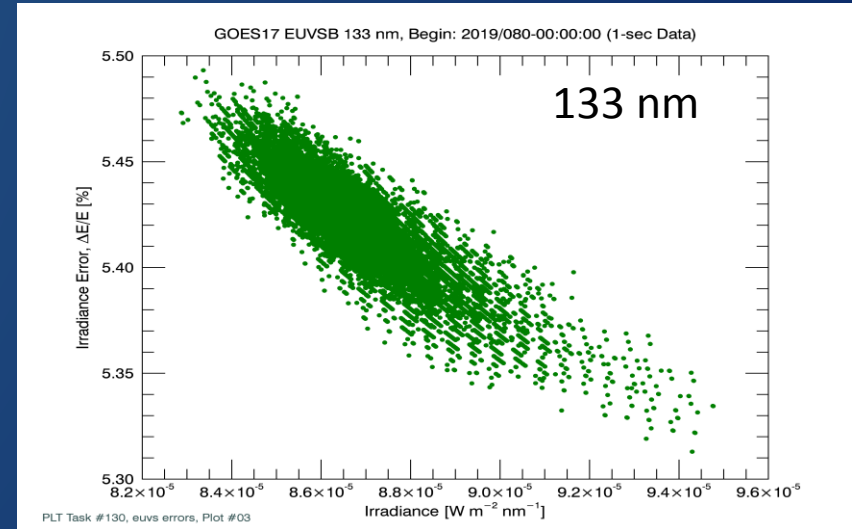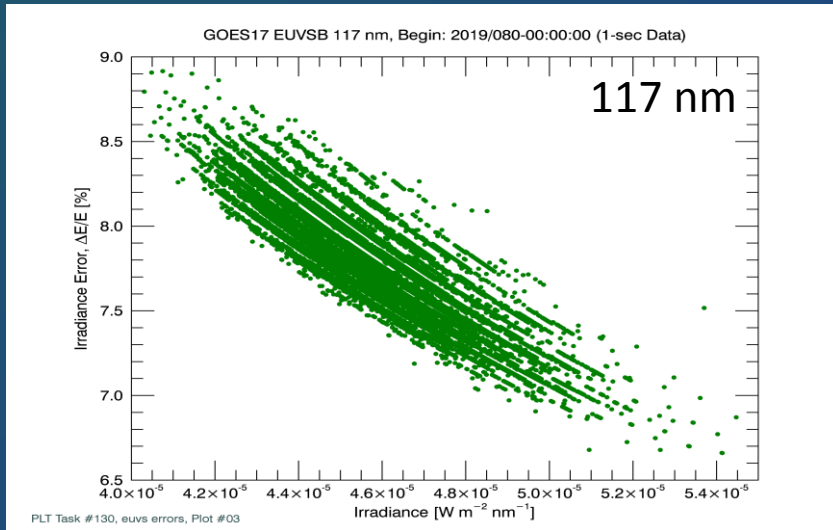

These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #4-7: EUVS Degradation

- Original plan was "bootstrap" calibration:

#4	Mg II -to- 117.5/133.5
#5	117.5/133.5 -to- 121.6/140.5
#6	121.6/140.5 -to- 25.6/30.4
#7	25.6/30.4 -to- 28.4

- *Instead*, on-orbit degradation is calibrated with:
  - EUVS A comparisons to secondary filter (and/or Mg II or SDO ESP)
  - EUVS B comparisons to SORCE SOLSTICE (will switch to Mg II)
- The following slides show the current degradation calibration and early investigation of using Mg II for calibration.

# EUVS-A Degradation Tracking (1/4)

EUVS-A (25.6, 28.4, 30.4 nm)

- Filters were calibrated at SURF.
- On orbit degradation is tracked by daily and weekly calibrations.
  - Daily comparisons are made between primary and secondary filters.
  - Weekly calibrations are with the tertiary plus one other filter.
  - Corrections provided in LUTs of the form:




$$f_{FF} = p_0 + p_1 \cdot \exp\left(\frac{-t-p_2}{p_3}\right) + (p_4 \cdot t)$$

- June 2018 SDO rocket test may provide additional calibration.

# EUVS-A Degradation Tracking (2/3)

## Primary to secondary filter ratios

- Red lines are fits to degradation.
- Fit uncertainties depend on signal strength: approx.  $\pm 0.5$  to 3%

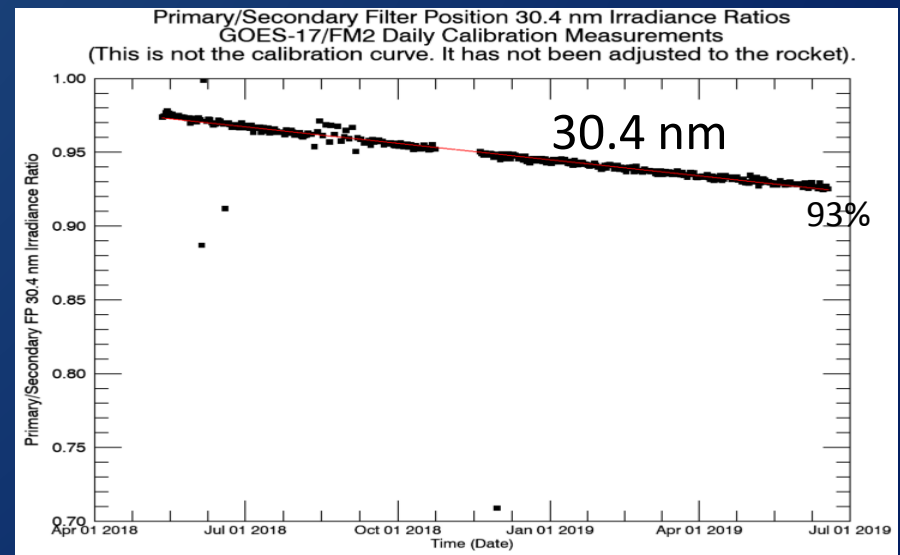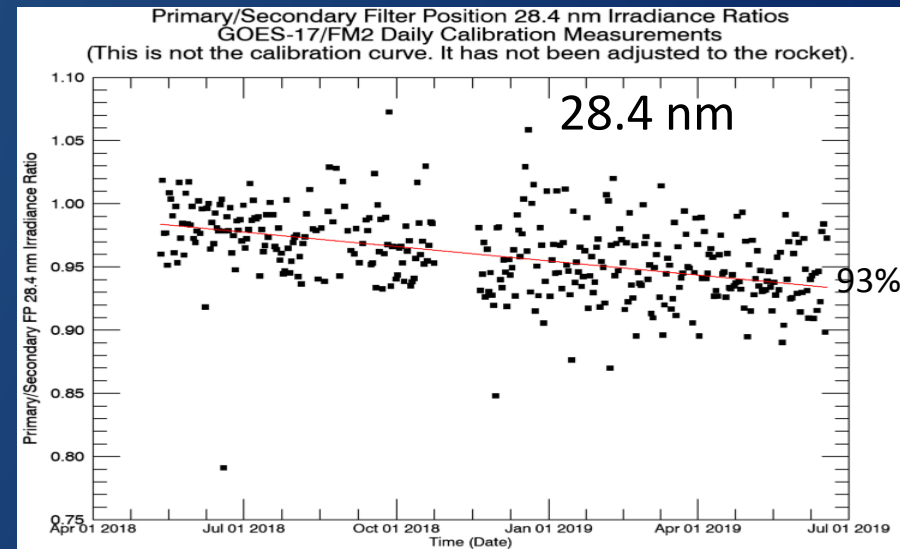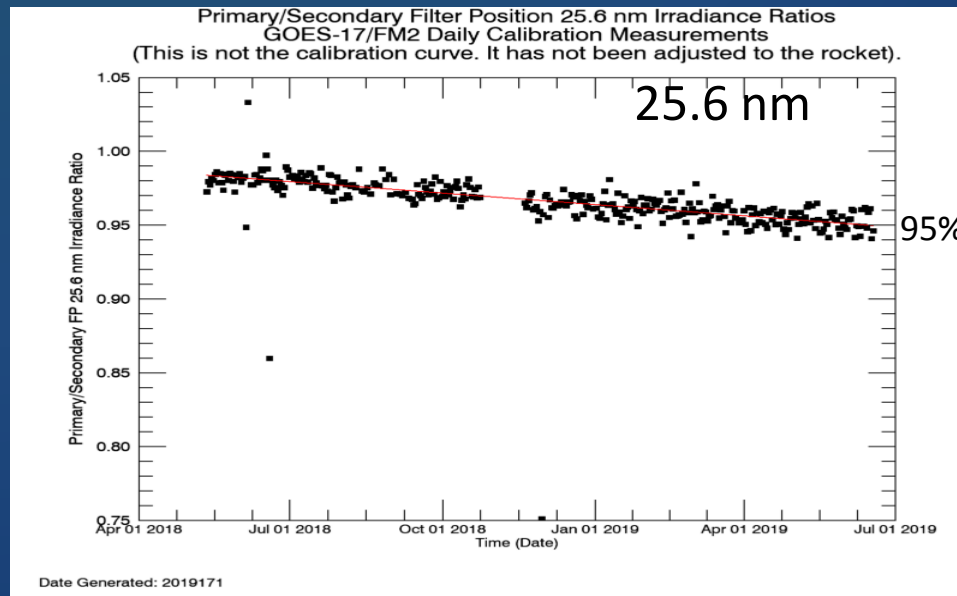

Credit: Don Woodraska.

These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.






# EUVS-A Degradation Tracking (3/3)

## Secondary to Tertiary Ratios

Secondary to tertiary filter ratios

- Green lines are fits
- All filters degrading

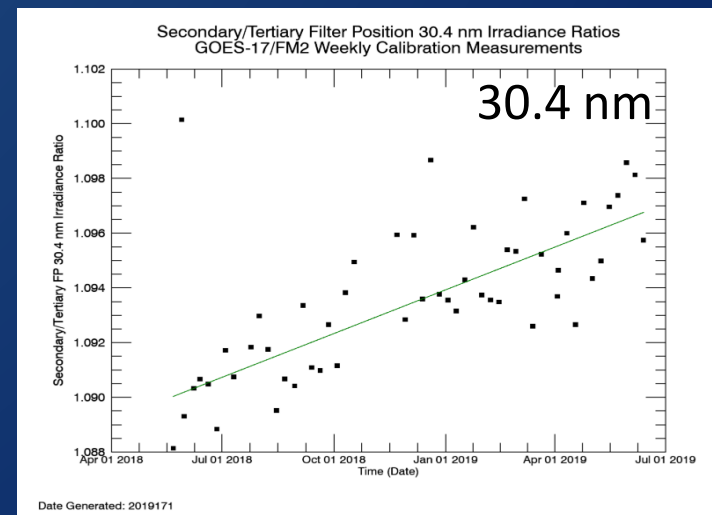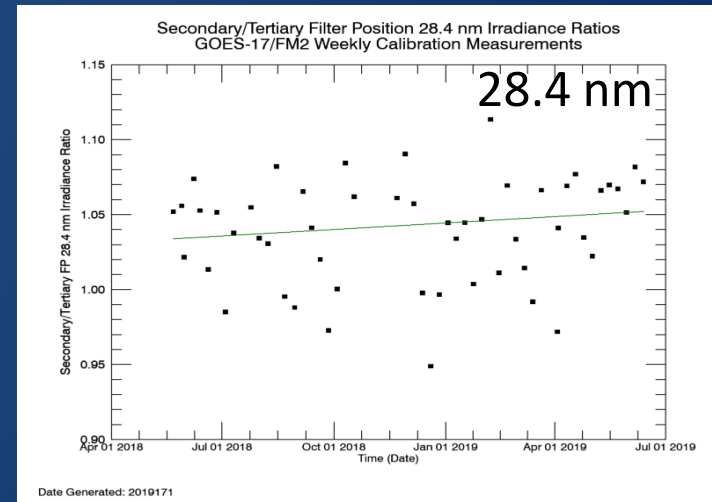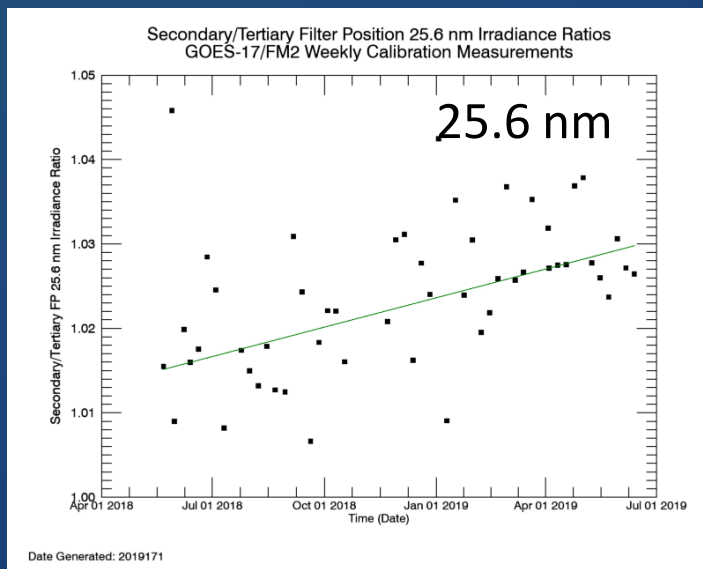

Credit: Steve Mueller

These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.




# EUVS-B Degradation Tracking (1/6)

EUVS-B (117.5, 121.6, 133.5, and 140.5 nm)

- Degradation determined by ratio with SOLSTICE.
  - Distinct fits over different time intervals.
  - Fits will use Mg II in 2020+ (after SOLSTICE end of mission.)
- Contributions to irregular behavior:
  - SOLSTICE calibrations and limited duty cycle
  - Possible degradation rate changes with solar variability and ops changes
  - Most recent fit needs to be updated with new data
- Results
  - Degradations corrected for all lines to a few percent
  - 117 and 133 nm lines show sharp increase (recovery) after launch
  - At current rate, signal level in mid-2024 will be a factor of:
    - 121 nm: 0.28, 133 nm: 0.46, 140 nm: 0.49, 117 nm: 'unknown'

# EUVS-B Degradation Tracking (2/6)

## 117 nm

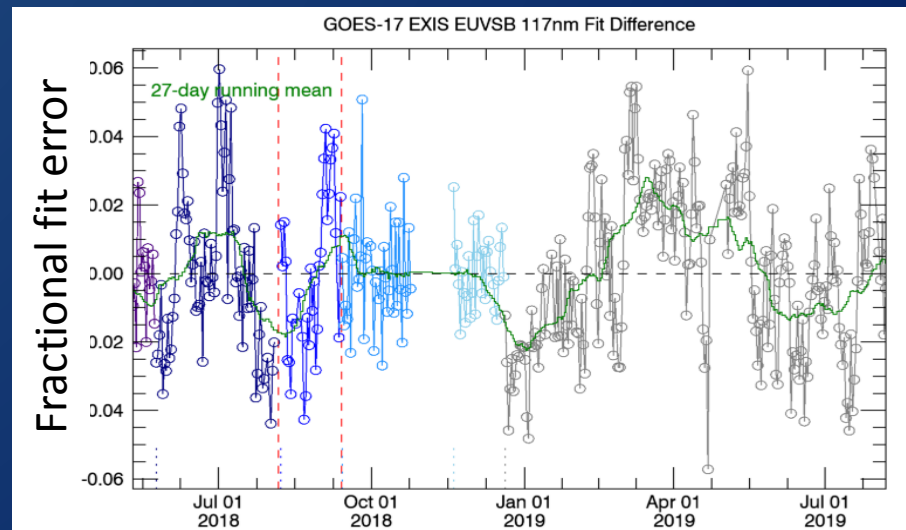
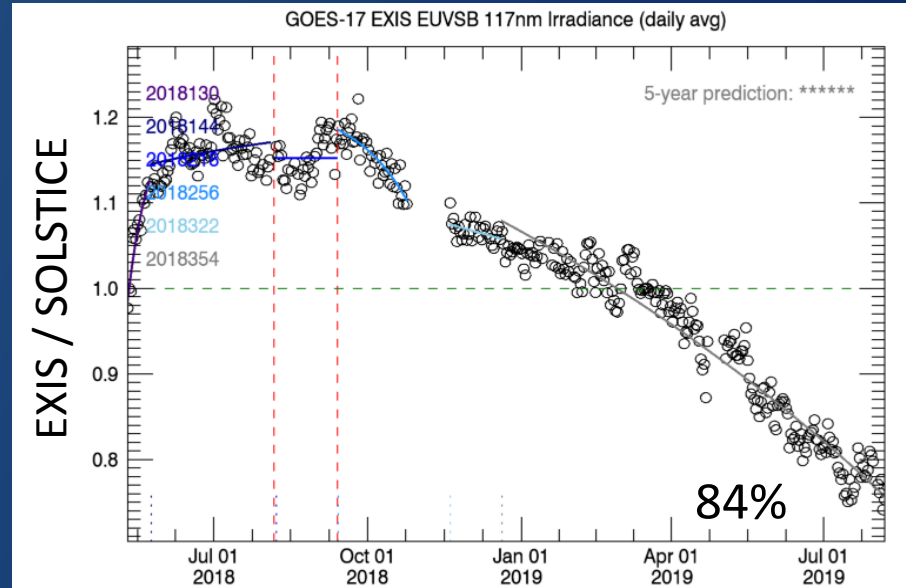
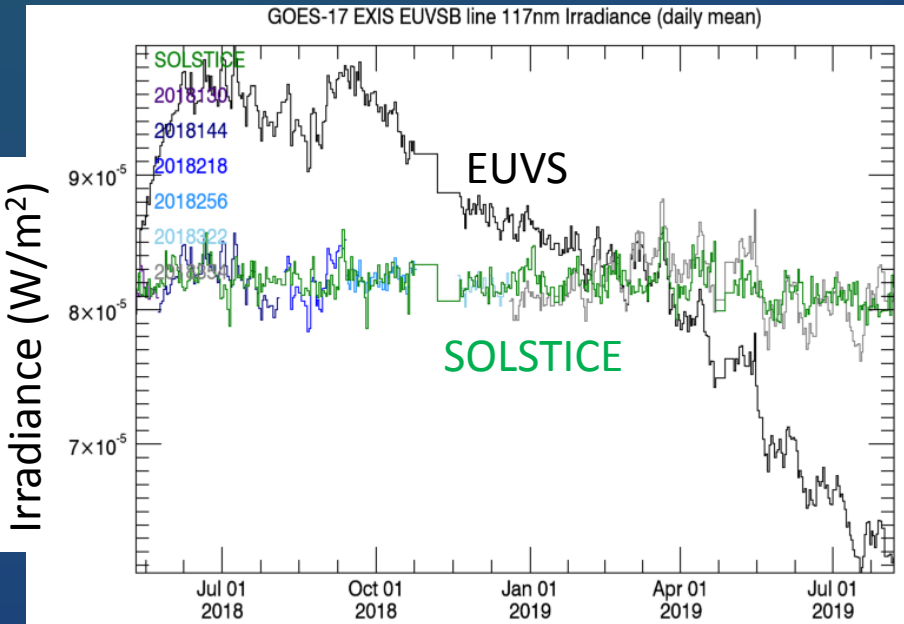


Credit: Don Woodraska

These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# EUVS-B Degradation Tracking (3/6)

## 121 nm

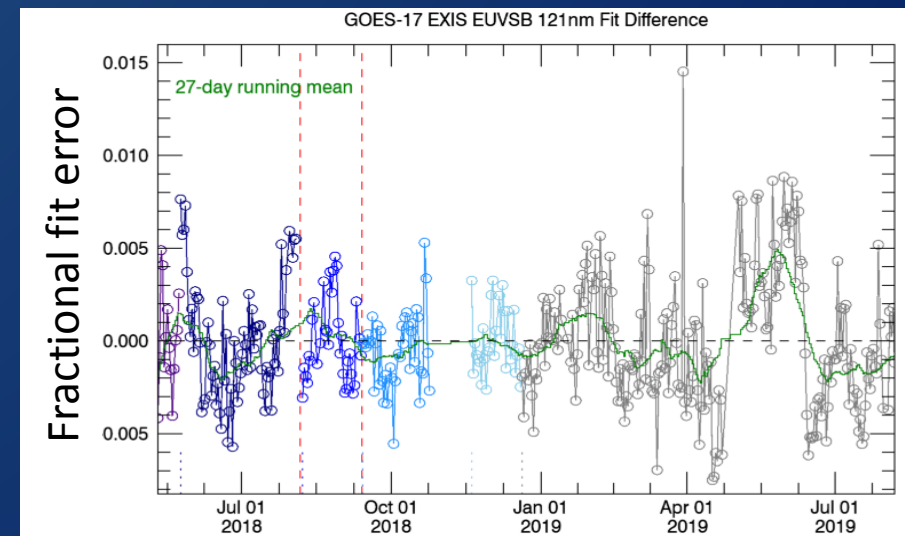
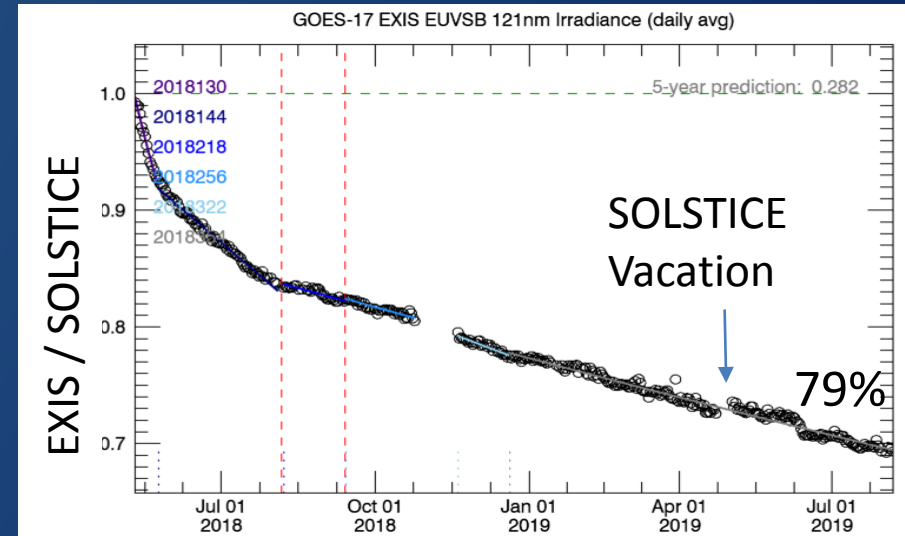
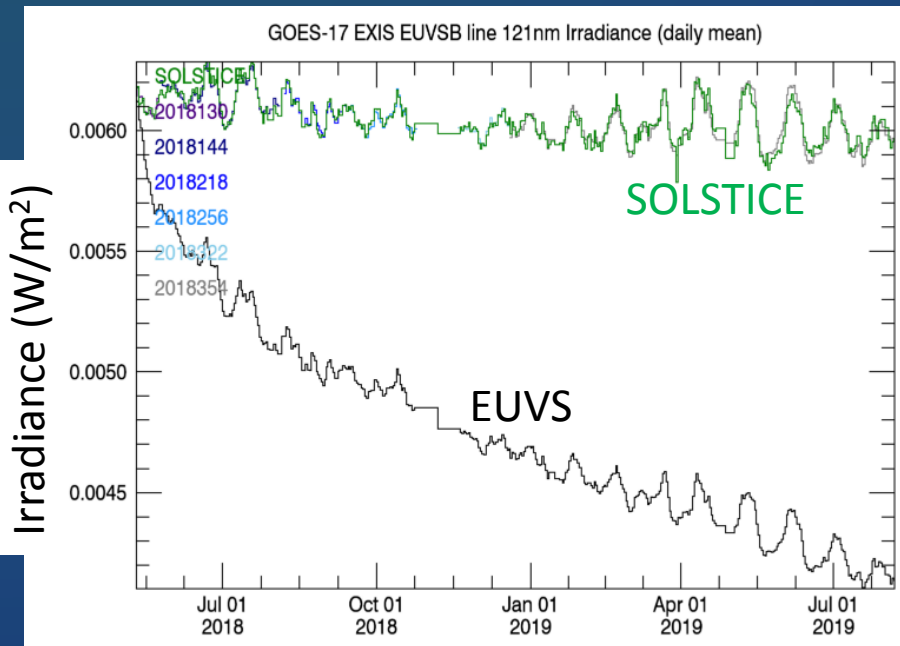


Credit: Don Woodraska

These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# EUVS-B Degradation Tracking (4/6)

## 133 nm

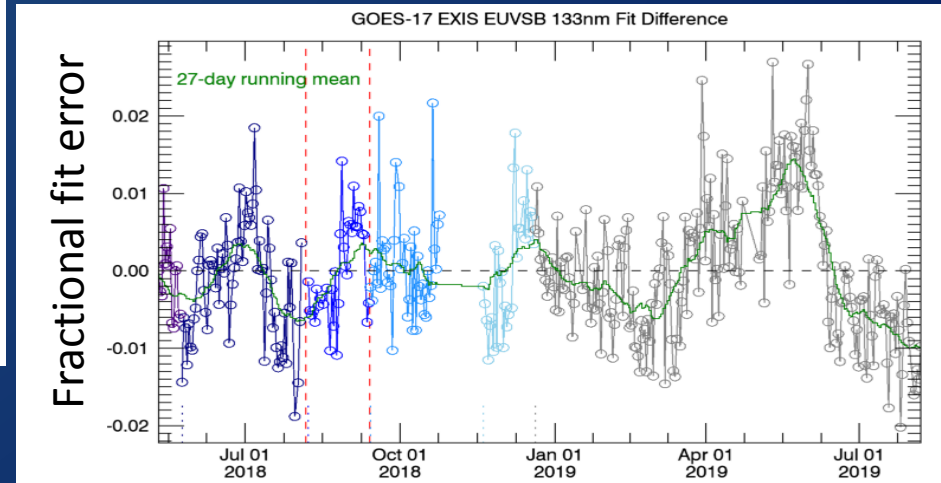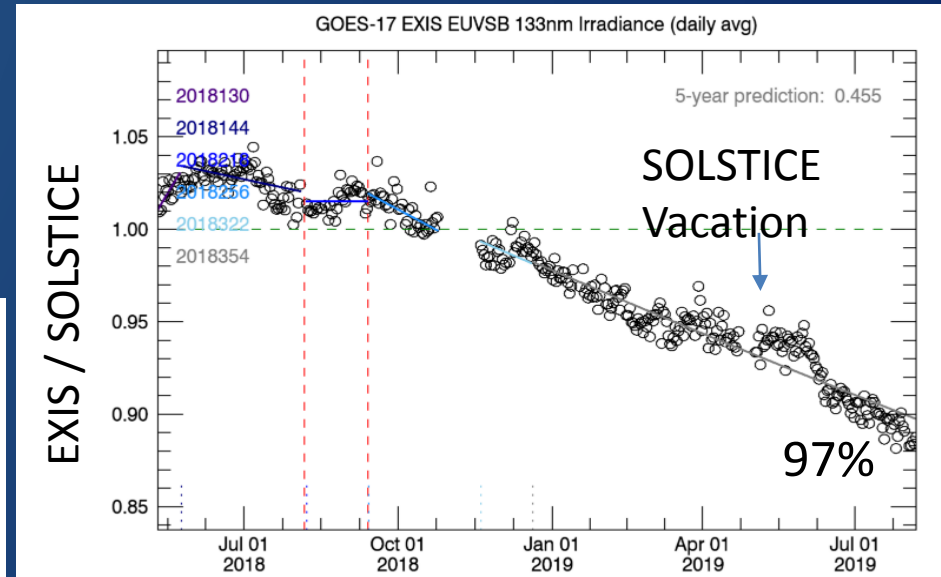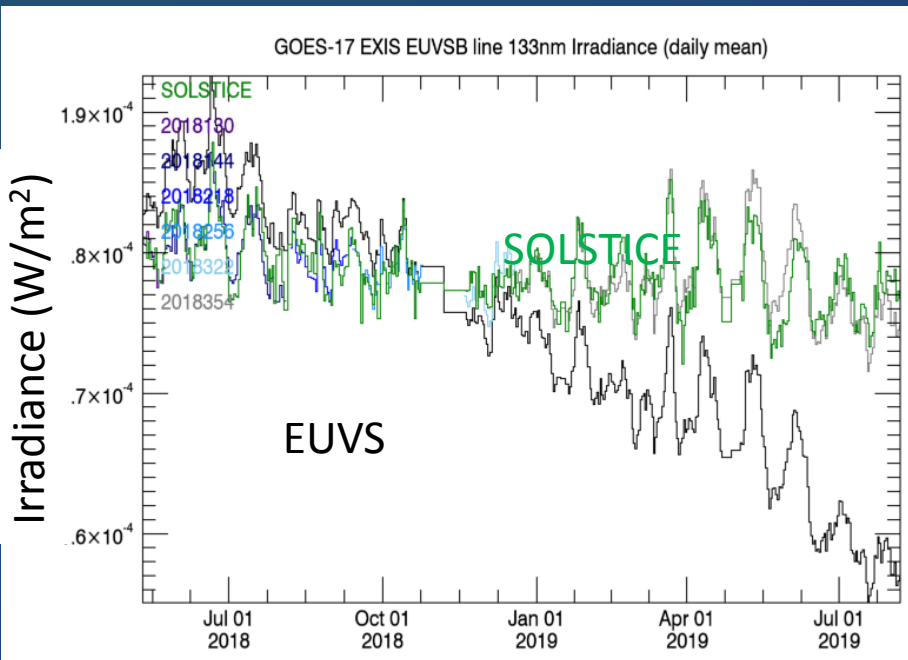


Credit: Don Woodraska

These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.


# EUVS-B Degradation Tracking (5/6)

## 140 nm


GOES-17 EXIS EUVSB line 140nm Irradiance (daily mean)

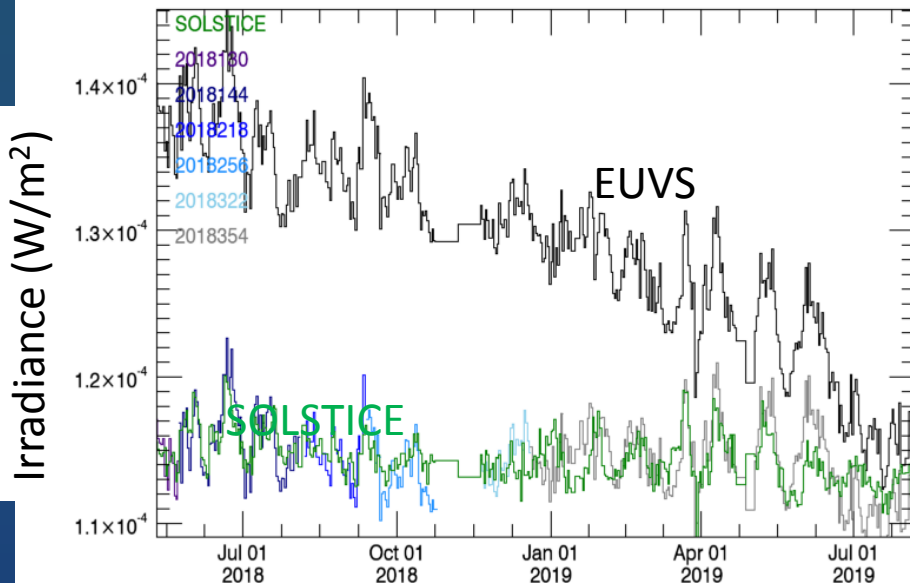

GOES-17 EXIS EUVSB 140nm Irradiance (daily avg)

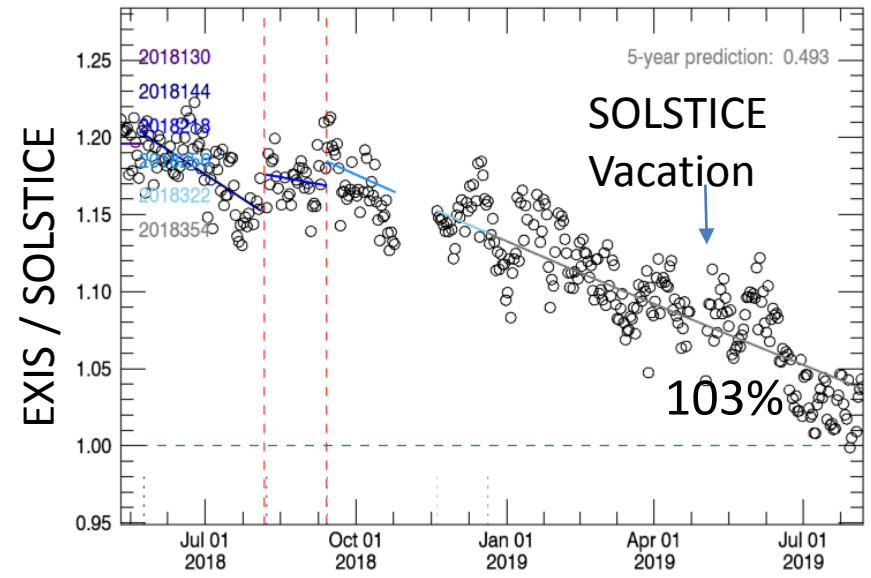

GOES-17 EXIS EUVSB 140nm Fit Difference

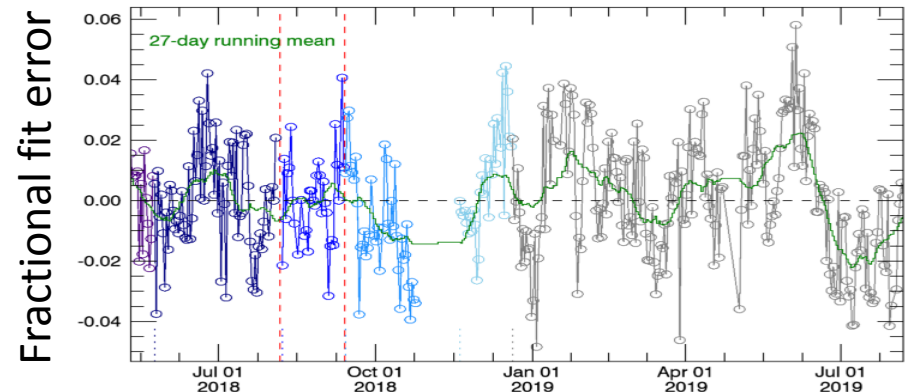

Credit: Don Woodraska


These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# EUVS-B Degradation Tracking (5/6)

## Scaling with Mg II

Early tests with GOES-16 data to determine degradation with Mg II proxy




Wavelength (nm)	Error wrt SORCE
25.6	~3%
28.4	?
30.4	~3%
117	?
121	3%
133	2-3%
140	2-3%

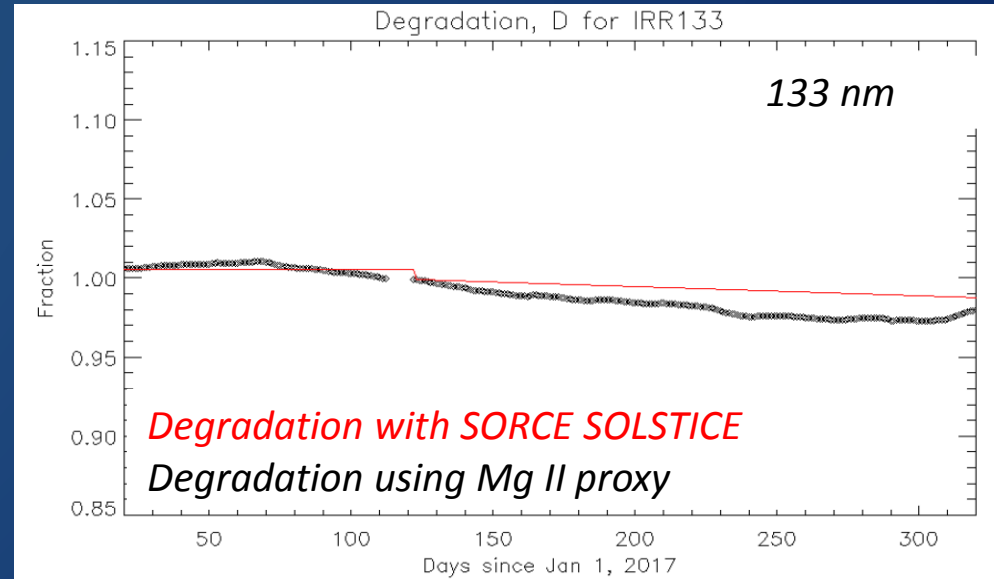

# EUVS-A Degradation Calibration with Mg II

- A Mg II proxy is created for each line for GOES-16.
- The ratio of line to proxy provides the degradation.

degradation from Mg II proxy  
degradation from SOLSTICE

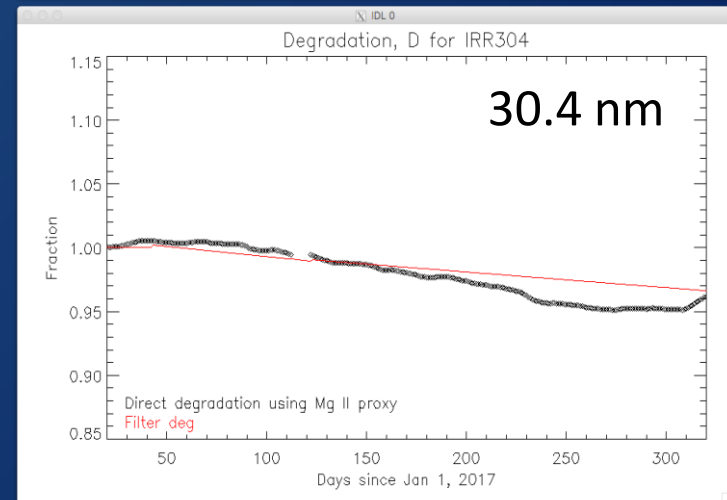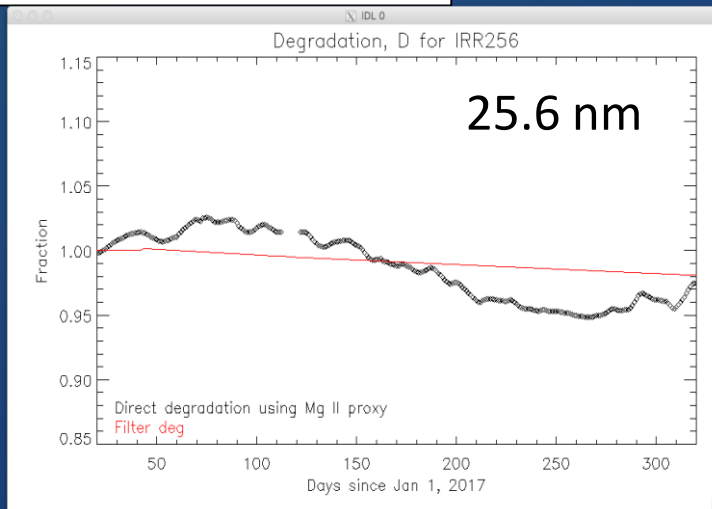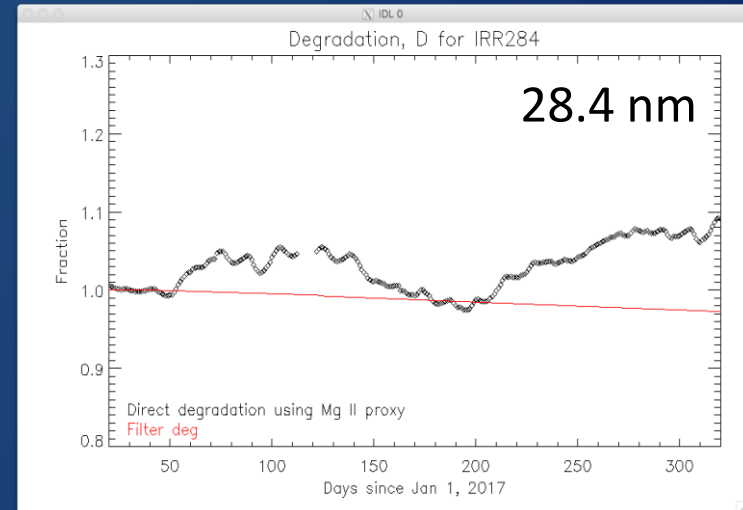





Credit: Don Woodraska

These GOES-16 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.



# EUVS-B Degradation Calibration with Mg II

degradation from Mg II proxy  
degradation from SOLSTICE

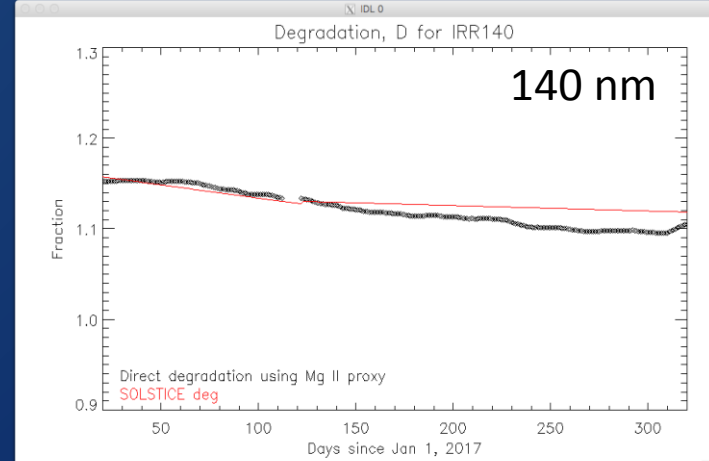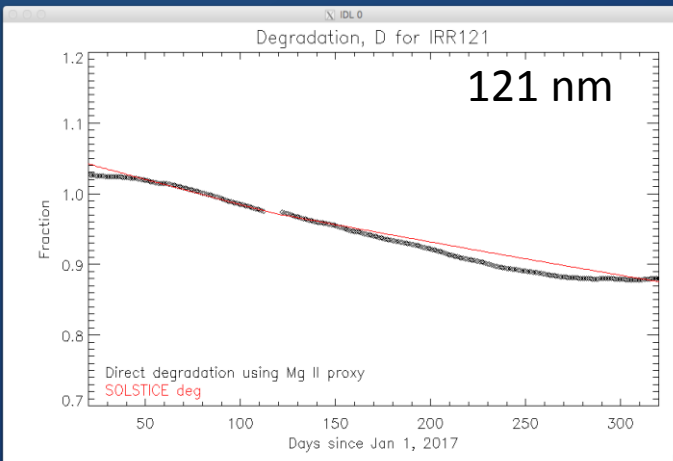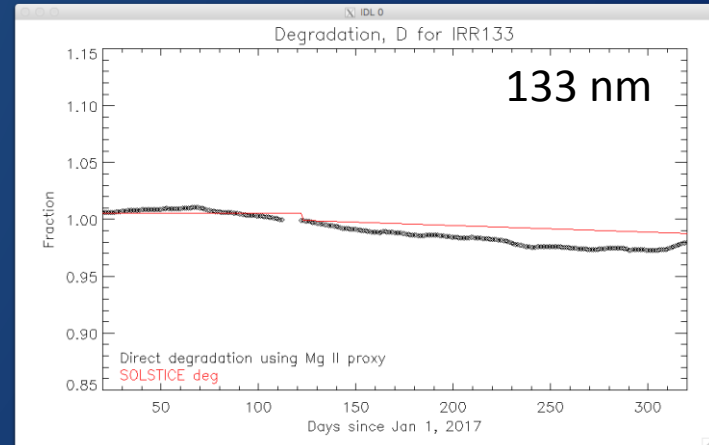
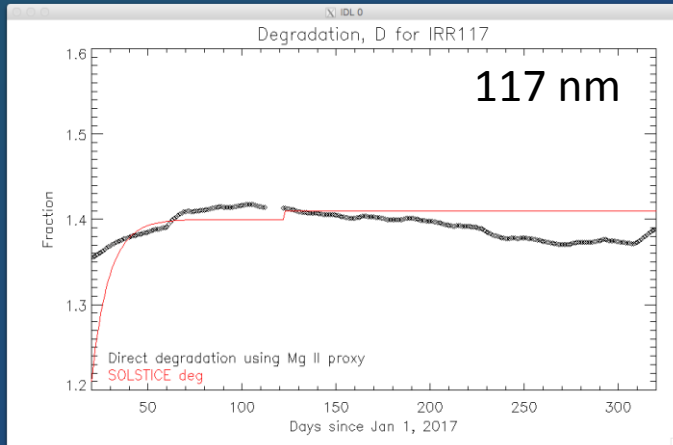


Credit: Don Woodraska

These GOES-16 data are preliminary, non-operational data and are undergoing testing.  
Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.



# EUVS-C Degradation Tracking and Mg II Stability

- Red wing and blue wing degradations
- Mg II index is not impacted significantly

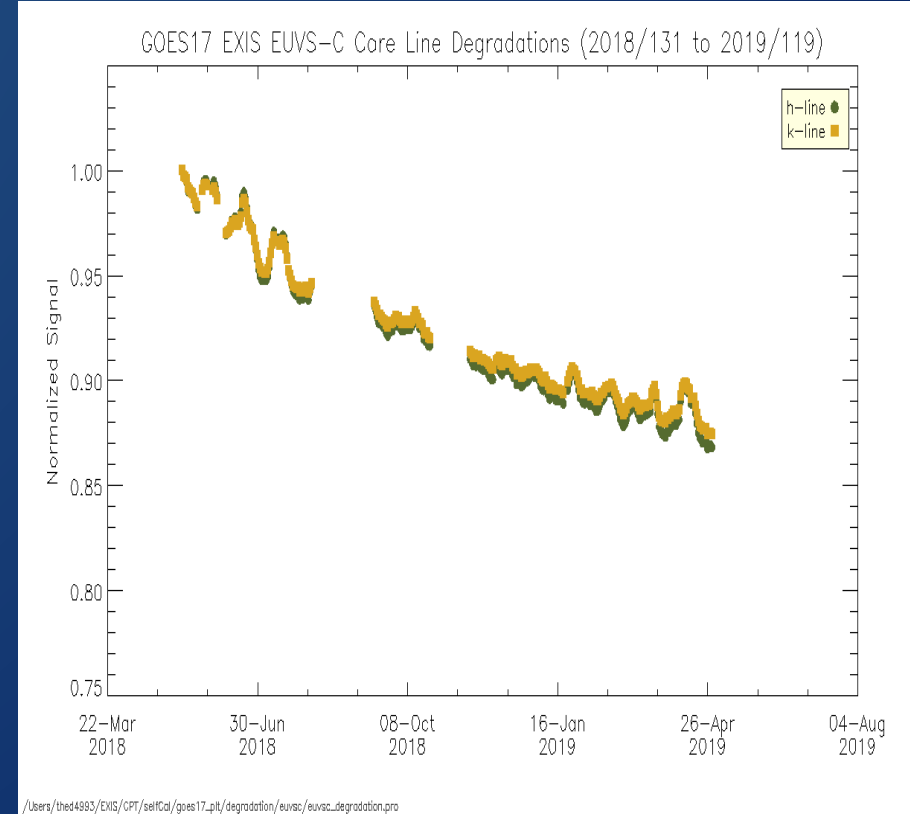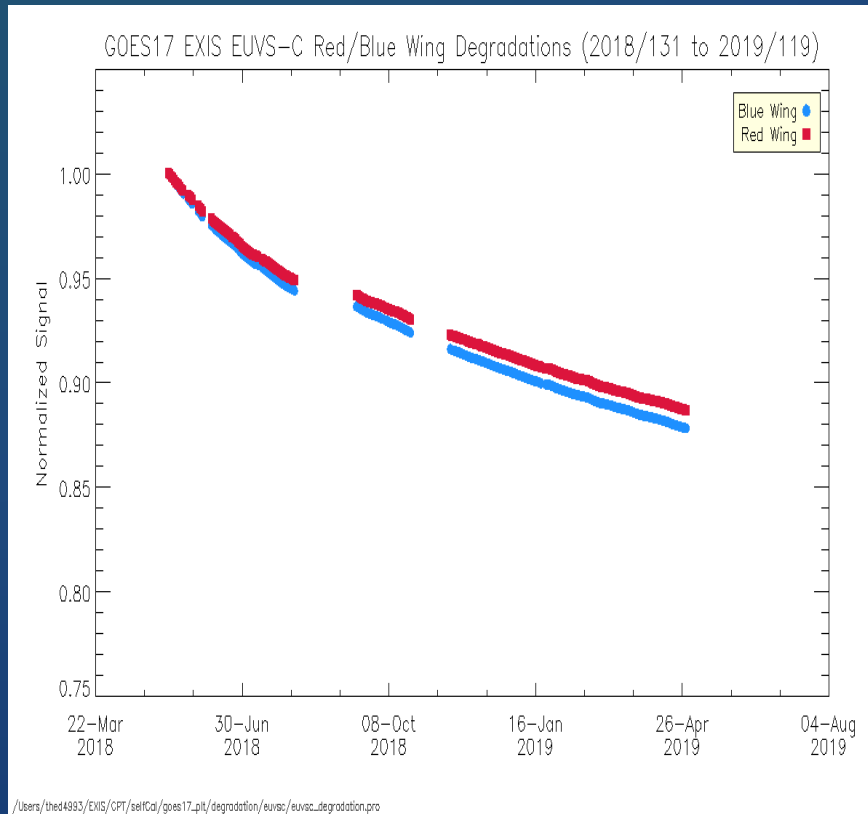

# #14: EUVS/Mg II Inter-Satellite Comparisons

- EUVS-A: GOES-16 compared to GOES-17
  - G17 and G16 have different bandpasses and so do not agree for dim lines.
  - Degradation has not been updated recently.
  - Shows need for frequent calibration tests to determine trends.
  - Shows impacts of ECI.



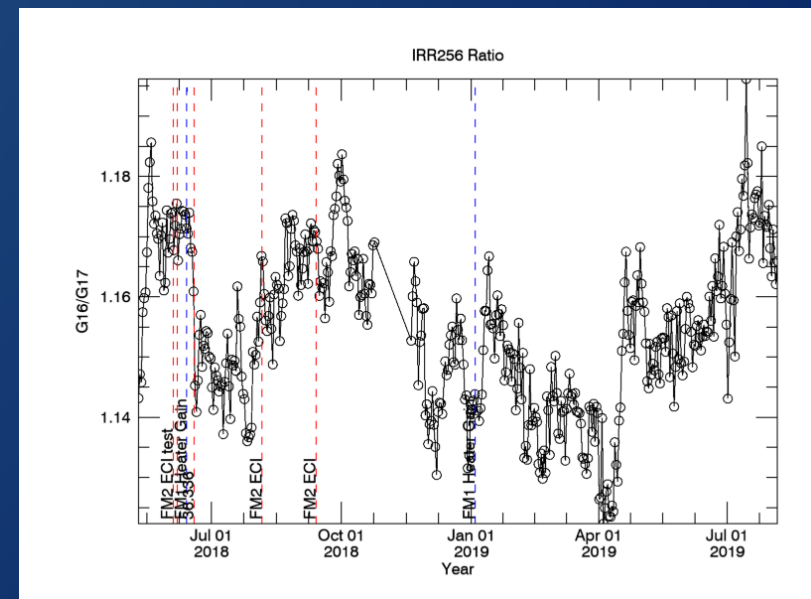
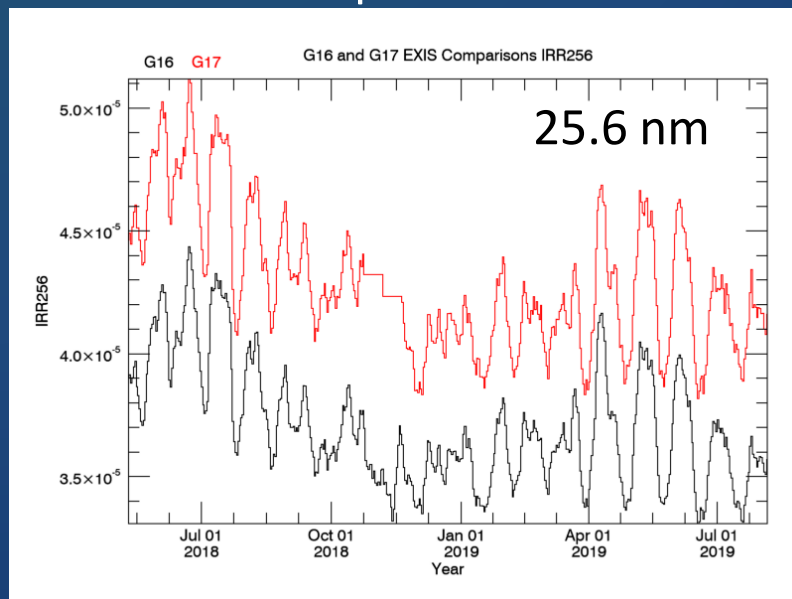


Credit: Don Woodraska

These GOES-16 and -17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #14: EUVS/Mg II Inter-Satellite Comparisons

- EUVS-A: GOES-16 compared to GOES-17

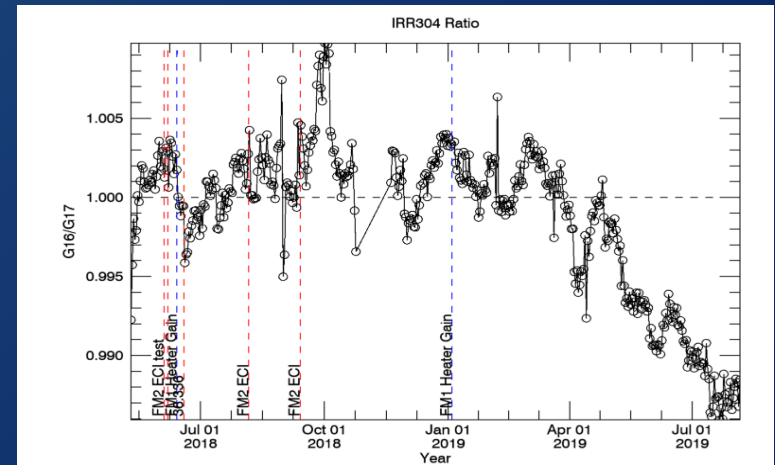
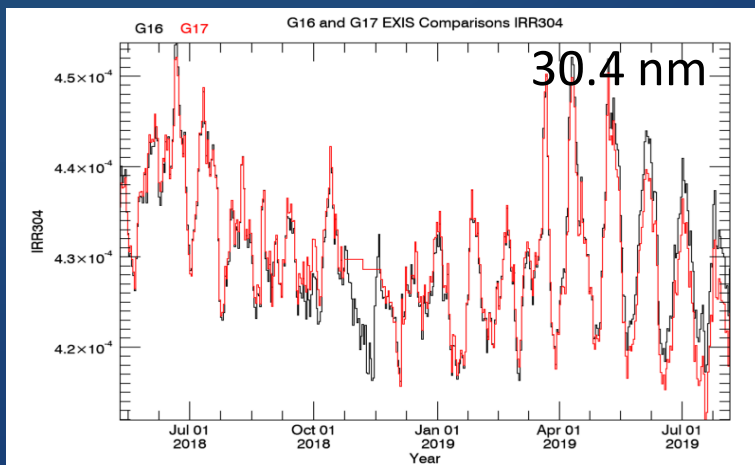
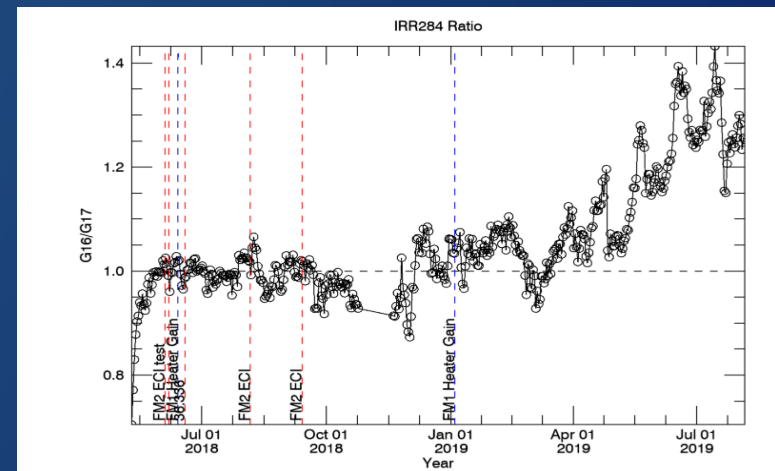
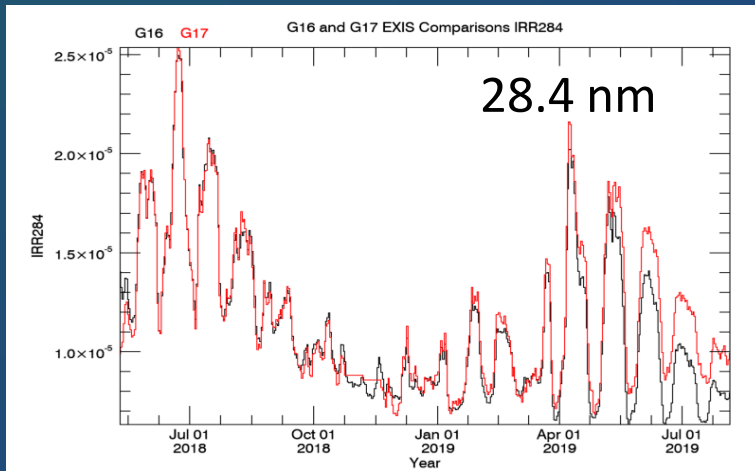


Credit: Don Woodraska

These GOES-16 and -17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #14: EUVS/Mg II Inter-Satellite Comparisons

- EUVS- B: GOES-16 compared to GOES-17
  - Latest calibration correction not determined/applied to G17
  - Shows need for constant monitoring, recalibration, reprocessing

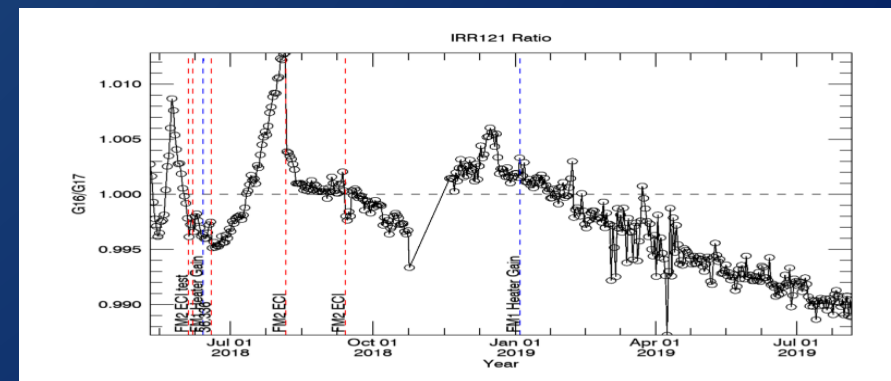
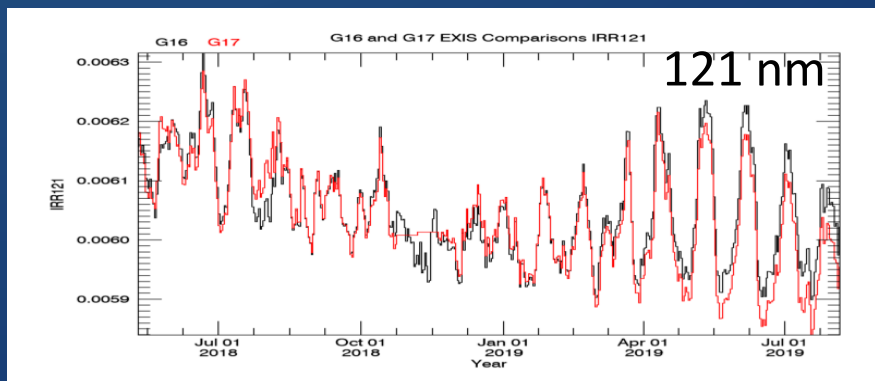
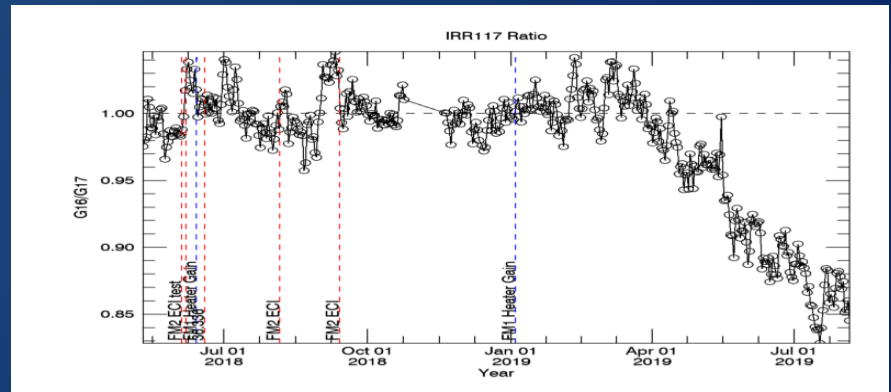
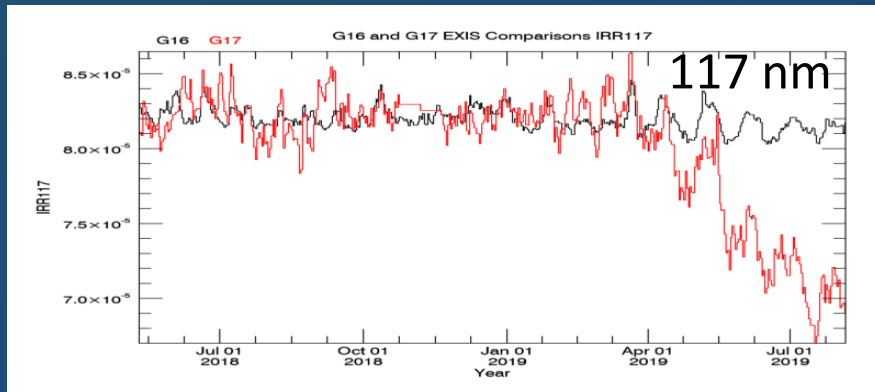


Credit: Don Woodraska

These GOES-16 and -17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #14: EUVS/Mg II Inter-Satellite Comparisons

- EUVS- B: GOES-16 compared to GOES-17

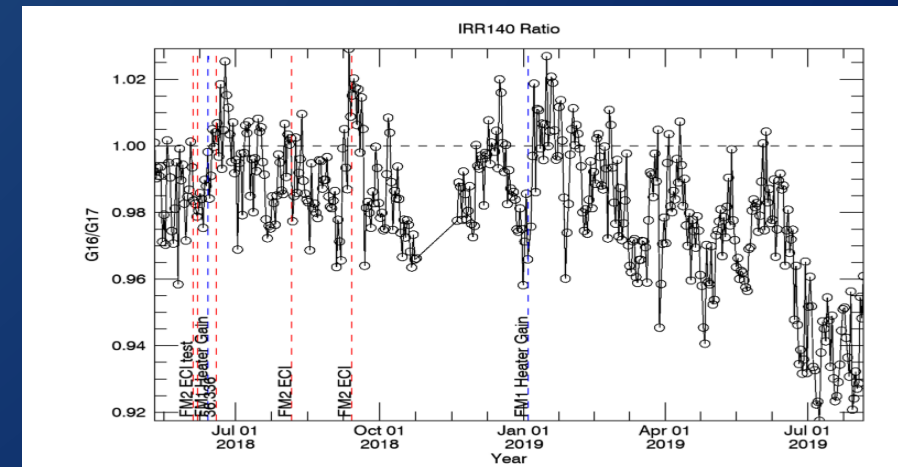
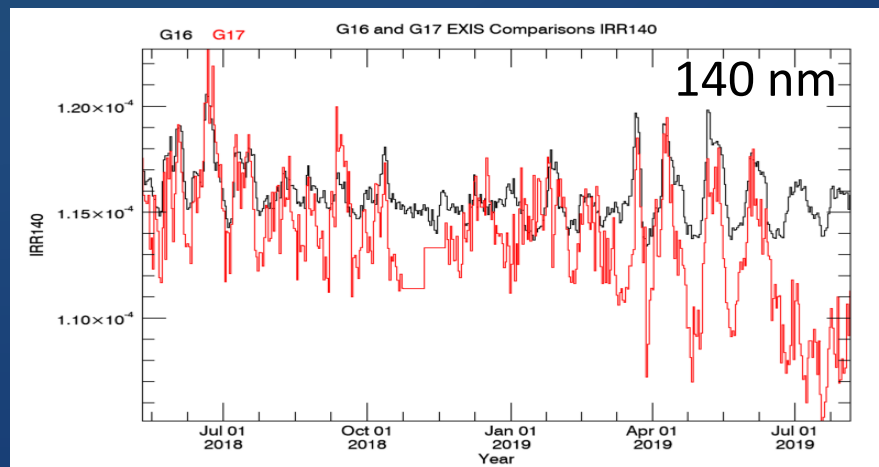
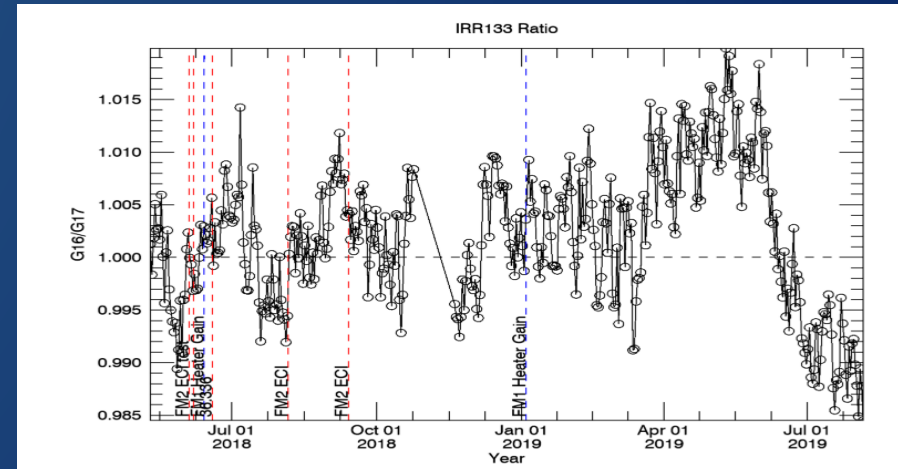
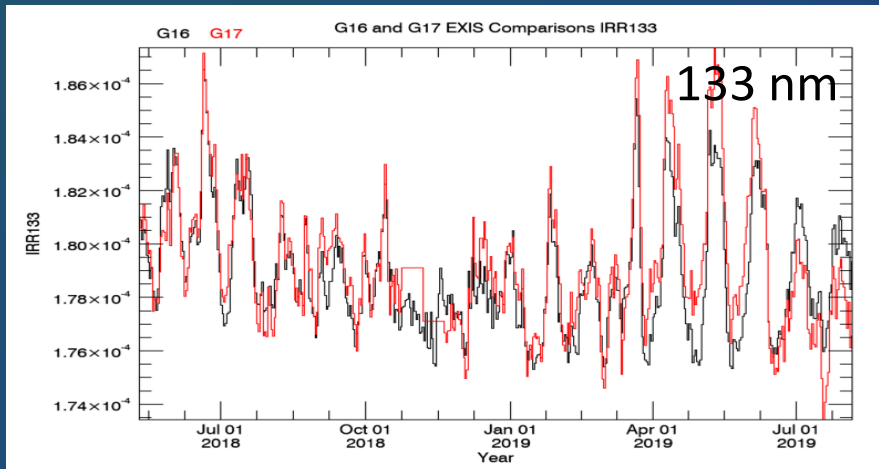


Credit: Don Woodraska

These GOES-16 and -17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #14: EUVS/Mg II Inter-Satellite Comparisons


- **EUVS-C:** Comparison of red and blue wings for GOES-16 and -17
  - ECI periods cause changes in degradation trends

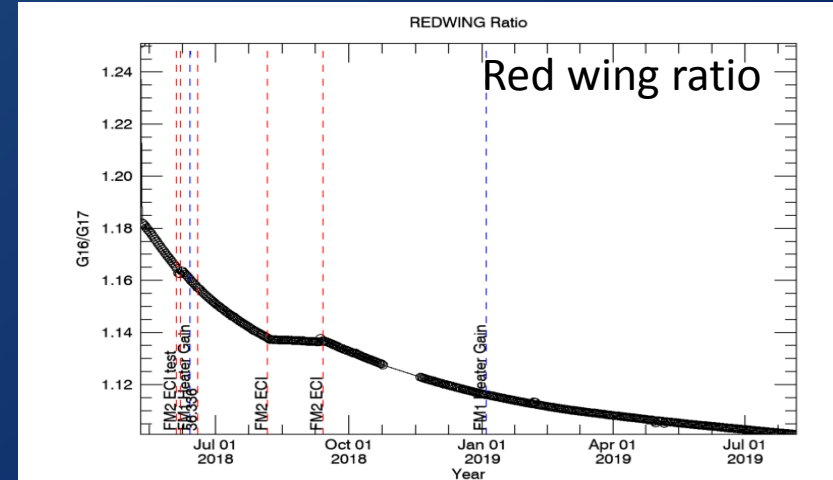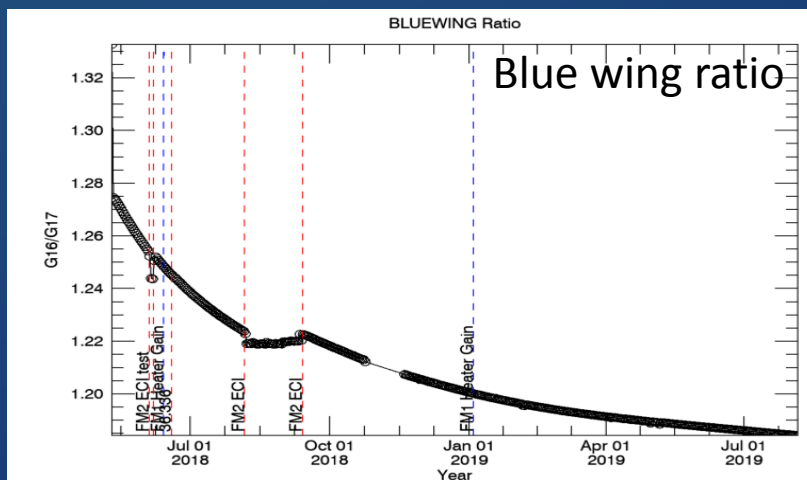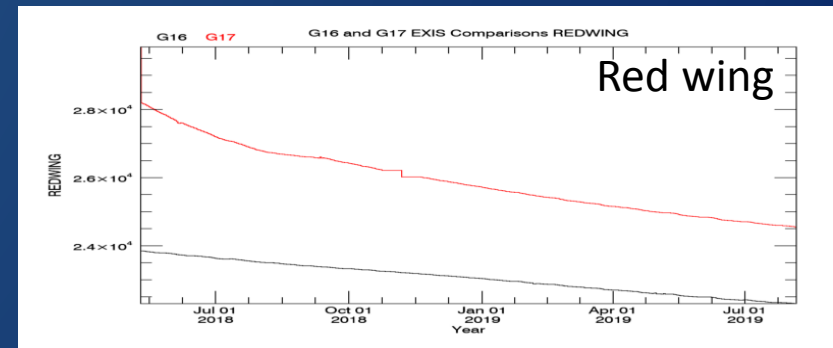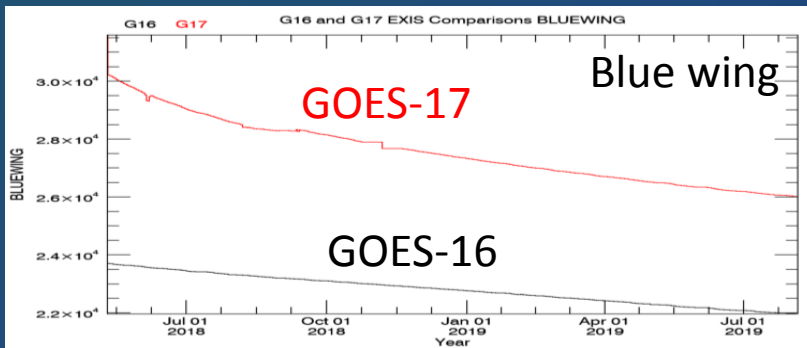

These GOES-16 and -17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# #14: EUVS/Mg II Inter-Satellite Comparisons

- EUVS-C: Comparison of daily Mg II for GOES-16 and -17
  - ECI periods have incorrect Mg II values with current L1b GPA code

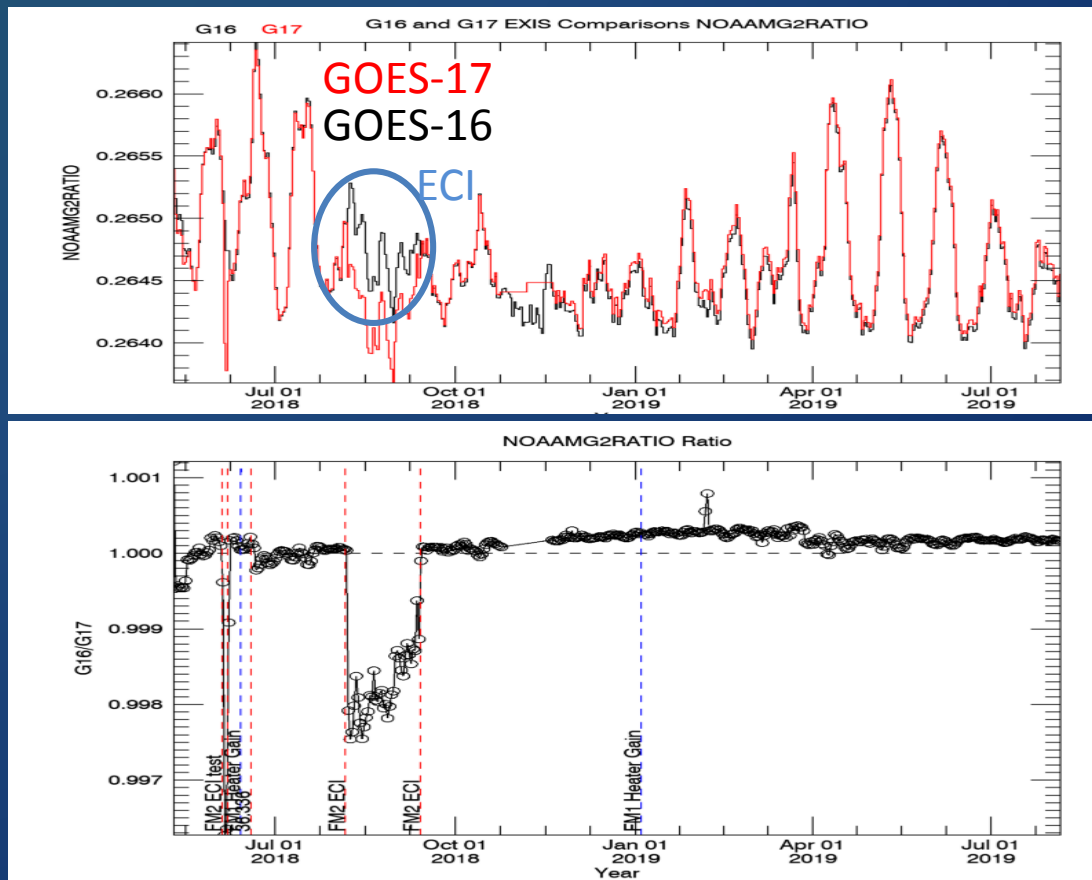


These GOES-16 and -17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.



# #14: EUVS/Mg II Inter-Satellite Comparisons


- **EUVS-C:** Mg II comparison of 30-s G-16 and -17 for August 2019
  - Mg II variation over (a quiet) month is 1.3%
  - Daily variation due to Doppler shifts(?), more pronounced on GOES-17.
    - 0.3% on GOES-16, 0.6% on GOES-17
    - GOES-16/GOES-17 Mg II ratio has daily variation of 0.3%.
  - Cause of variability is...Doppler impacts? ..... need further investigation.

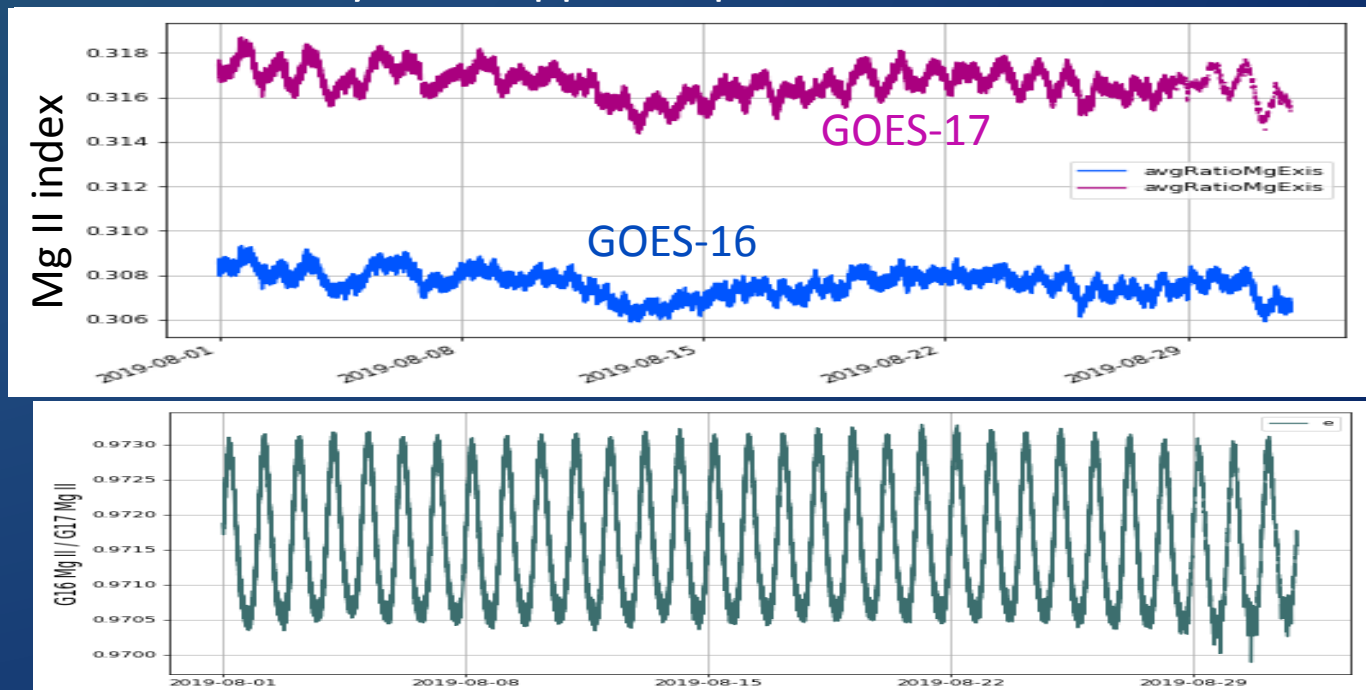


These GOES-16 and -17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# Instrument Issue: ECI (1/2)

- XRS flag good 30 s every 11 minutes

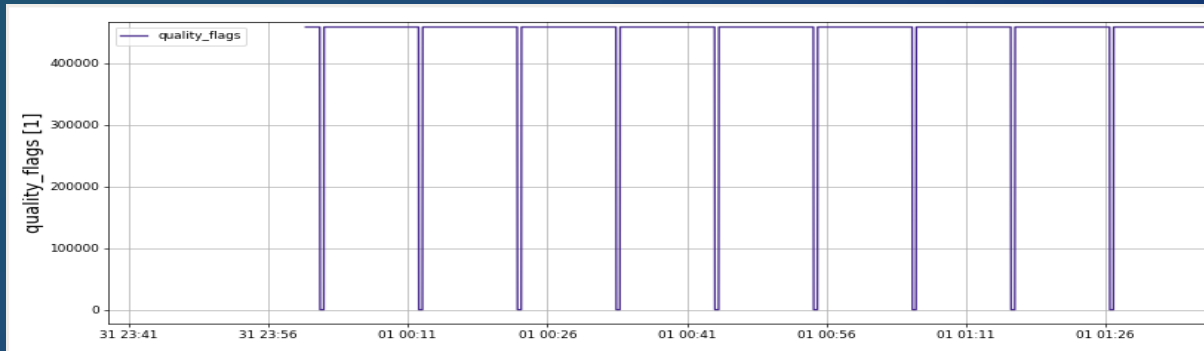


- Mg II does not work with 7 arcmin requirement.
  - works okay for +/- 0.2 arcmin instead of 7 arc min

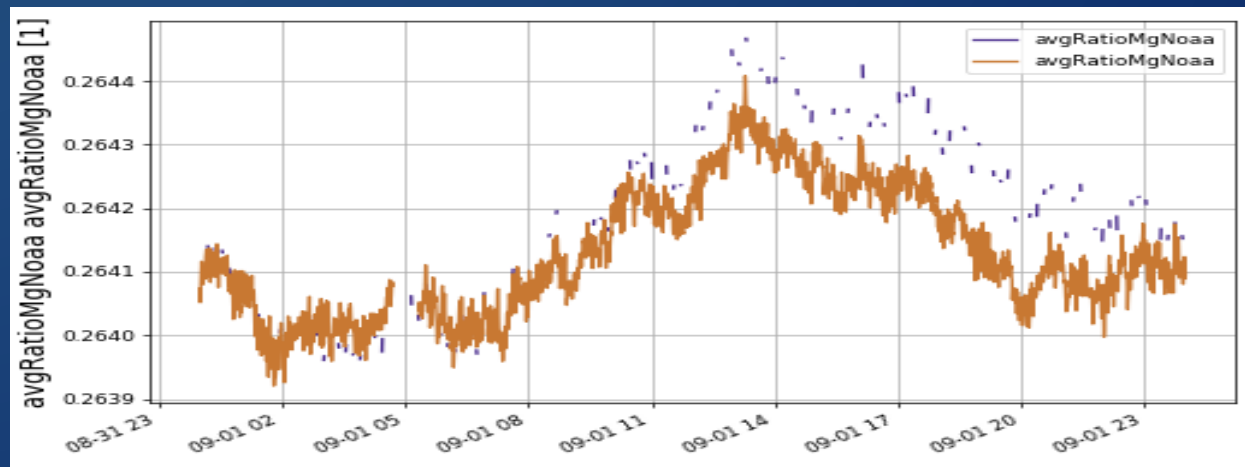


These GOES-17 data are preliminary, non-operational data and are undergoing testing. Users bear all responsibility for inspecting the data prior to use and for the manner in which the data are utilized.

# Instrument Issue: ECI (2/2)

- Sept 1 comparison of irradiance between G16 and G17

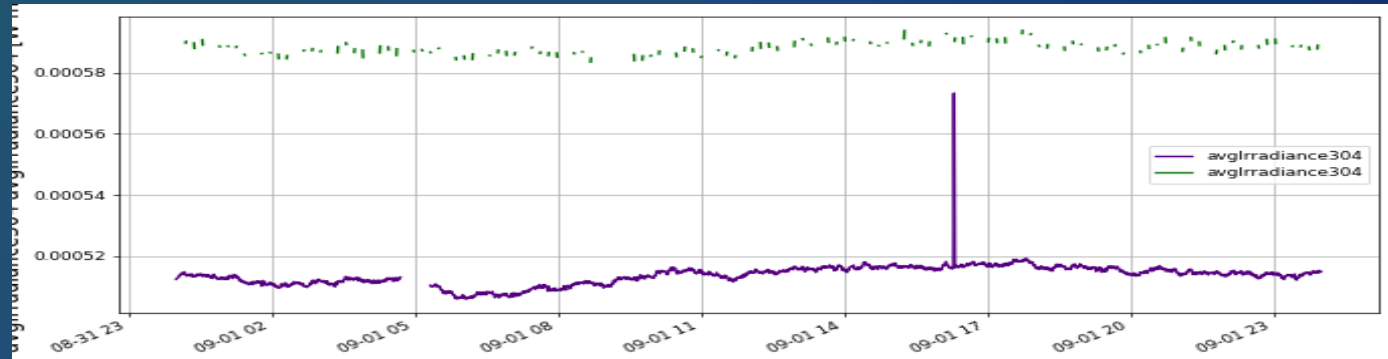

- August 1 comparison of irradiance between G16 and G17

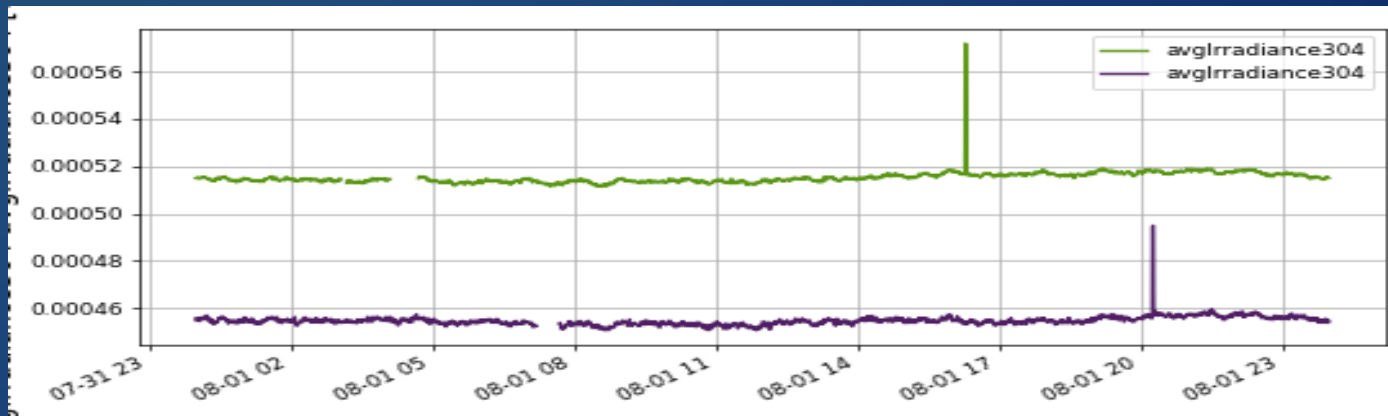

# COMPARISON TO PERFORMANCE BASELINE

# Performance Baseline

MRD ID	Quantity	MRD Requirement	MIT/LL Predicted Performance	NCEI Value at Provisional*	Related PLPTs	Status
577	EUVS Long-term stability (life of mission)	< ±5% or ability to track	Track Changes	Track Changes	04, 05, 06, 07	PASS
2027	EUVS Product Measurement Range	EUVS-A: 0.5X to 10X solar max 1.4x10 <sup>-5</sup> to 5.3x10 <sup>-2</sup> W/m <sup>2</sup> EUVS-B: 0.5X to 10X solar max 1.4x10 <sup>-5</sup> to 5.3x10 <sup>-2</sup> W/m <sup>2</sup>	2.4x10 <sup>-7</sup> to 5.3x10 <sup>-2</sup> W/m <sup>2</sup>	EUVS-A: 6.3x10 <sup>-7</sup> to 1.03 W/m <sup>2</sup> EUVS-B: 1.4x10 <sup>-6</sup> to 1.19 W/m <sup>2</sup>	See next slides.	PASS
2028	EUVS Product Measurement Accuracy	< 20%	EUVS-A at 18.42% EUVS-B at 18.41% EUVS-C at 16%	EUVS-A: ≤4.0% EUVS-B: ≤5.9%	See next slides.	PASS
2031	EUVS Product Measurement Precision	< 20% at min flux	EUVS-A: 7.3% EUVS-B: 1.8%	EUVS-A: ≤3.3% EUVS-B: ≤5.9%	See next slides.	PASS
2032	EUVS Long-term stability	< ±5% or ability to track	Track Changes	Track Changes	04, 05, 06, 07	PASS




\* Sources of values on following slides. Values calculated at 30 s cadence.

# Statistical Analysis

How the 30-s uncertainty is determined.

1. Here is the raw signal at a 1-s cadence.

3. Find 1- $\sigma$  from distribution of high pass filtered data.

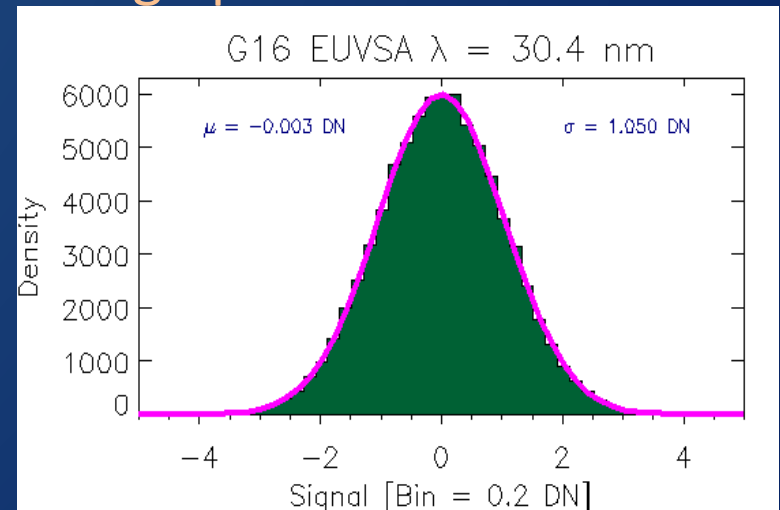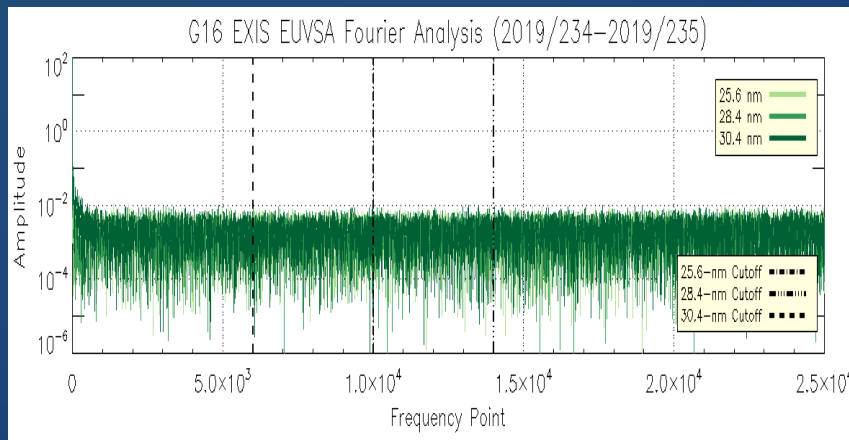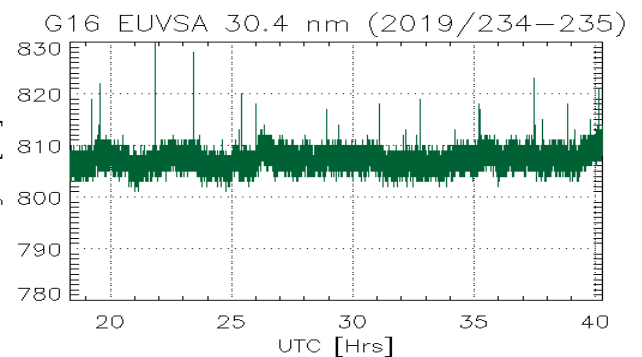

2. Perform FFT and choose appropriate cut-off frequency for high-pass filtering.

# Statistical Analysis

## Precision and 1-sigma Uncertainty (2/2)

Channel	Wavelength (nm)	----- Measured at 1 sec -----				PORD 30-s	Precision	Uncertainty
		Precision (W/m <sup>2</sup> )	1-sigma (DN)	1-sigma (W/m <sup>2</sup> )	Max Irrad (W/m <sup>2</sup> )	Min Irrad (W/m <sup>2</sup> )	/ PORD (%)	/ PORD (%)
EUUSA	25.6	1.58e-6	1.068	1.69e-6	1.03	8.80e-6	3.3	4.0
	28.4	2.07e-6	1.021	2.11e-6	1.34	1.36e-5	2.7	2.8
	30.4	2.89e-6	1.196	3.46e-6	1.41	1.32e-4	0.36	0.48
EUUSB	117.5	7.74e-6	1.000	7.74e-6	2.77	2.40e-5	5.9	5.9
	121.6	4.46e-6	1.401	6.25e-6	2.06	4.00e-3	0.20	0.36
	133.5	3.59e-6	1.009	3.62e-6	1.19	<none>		
	140.5	7.35e-6	1.000	7.35e-6	7.27	<none>		

s

### Notes:

1. Precision was calculated at 1 DN in each diode that comprises the line irradiance.
2. Maximum irradiance (989,000 DN) was calculated for two of the brightest diodes for any EUVS-A line in question, i.e., split diodes for 30.4. The calculation was done as a mean for each line on day 2019/235. For EUVS-B, Diodes 8 & 9 (split diodes) were used for 121 nm; for 117 nm, diode 15 is used; for 133 nm, diode 20 is used; and for 140 nm, diodes 2 & 3 are used.
3. Ratios of measured value to the PORD minimum irradiance values were calculated at a 30-s cadence by dividing the 1-s measured values by  $\sqrt{30}$ .

Credit: Tom Eden

# **SUMMARY OF REMAINING ISSUES**



# EUVS GPA Issues to be completed before Full Validation

ADR	Issue	*	Description / Impacts	Delivery date
471	EUVS-A, -B dark time dependence	Major Impact	7% offsets in 121 nm	?
523	Reduce packet size for APID 255.	Moderate Impact	reduce from 20 Hz data	?
872	Solar array currents incorrect in GOES-17	Minor Impact	telemetry issue	[1]
894	Lunar transit flag not set	Minor Impact		[1]
898	EUVS dark current temperature correction	Major Impact	adds false variability	[1]
958	Change EXIS LUT variables to double precision	Moderate Impact		[1]
1002	Move "...leap seconds" from units to long name.	Minor Impact		?

[1] targeted patch in Spring 2020

\* Impact on status:

Minor Impact

Moderate Impact

Major Impact

# Remaining Instrument EUVS Issues

#	Issue	Description	Comments to Users
1	Create Mg II proxies for degradation	Need to create Mg II proxies for EUVS to use for degradation models	This is required for calibration of EUVS after SORCE SOLSTICE is turned off in January 2020
2	ECl data	GOES-17 ECl data needs correction	Data invalid during ECl period until reprocessed.
3	EUVS-A and -B temperature corrections	See list of remaining ADRs.	Data invalid until temperature corrections are implemented.
4	EUVS filter degradation	Need to improve understanding of degradations. Under investigation by LASP with Task Order 10.	This is essential to get correct degradation corrections.
5	rocket calibration	Recently available spectrum should be used to calibrate EUVS data.	This will validate irradiances.
6	EUVS-C spike removal	Determine if this should be added to L1b code.	Spikes can add noise to data.
7	EUVS model during flares	small revisions	
8	EUVS-C systematic behavior	Further detailed investigation of behavior of wings and lines.	Examine impacts of Doppler and seasonal effects and degradation.

# PROVISIONAL MATURITY ASSESSMENT

# Provisional Maturity Definition

- Validation activities are ongoing and the general research community is now encouraged to participate.
- Severe algorithm anomalies are identified and under analysis. Solutions to anomalies are in development and testing.
- Incremental product improvements may still be occurring.
- Product performance has been demonstrated through analysis of a small number of independent measurements.
- Product analysis is sufficient to establish product performance relative to expectations (Performance Baseline).
- Documentation of product performance exists that includes recommended remediation strategies for all anomalies and weaknesses. Any algorithm changes associated with severe anomalies have been documented, implemented, and tested.
- Testing has been fully documented.
- **Product is ready for operational use and for use in comprehensive cal/val activities and product optimization.**

# Provisional Validation (1/2)

Preparation Activities	Assessment
<p>Validation activities are ongoing and the general research community is now encouraged to participate.</p>	<p>Validation activities are ongoing. Results have been discussed with SWPC. Eventual release of data by NCEI will enable research community participation.</p>
<p>Severe algorithm anomalies are identified and under analysis. Solutions to anomalies are in development and testing.</p>	<p>The temperature issue has been developed and is awaiting GPA installation and testing.</p>
<p>Incremental product improvements may still be occurring.</p>	<p>Product improvements will result from the resolution to issues given on the slides titled "GPA Issues for Provisional Validation" and "Remaining Instrument EUVS Issues".</p>

# Provisional Validation (2/2)

End State	Assessment
Product performance has been demonstrated through analysis of a small number of independent measurements obtained from select locations, periods, and associated ground truth or field campaign efforts.	EUVS flux measurements have been compared with measurements from <i>SORCE SOLSTICE</i> and the Bremen Mg II composite. Instrument was calibrated at NIST.
Product analysis is sufficient to communicate product performance to users relative to expectations (Performance Baseline).	Yes, product performance will be communicated to users via the Readme <i>when</i> data is released.
Documentation of product performance exists that includes recommended remediation strategies for all anomalies and weaknesses. Any algorithm changes associated with severe anomalies have been documented, implemented, tested, and shared with the user community.	The PUG and CDRL80 require some updates. This presentation details major remaining issues and remediation strategies. The Readme will summarize remaining issues and strategies. Strategies have been discussed extensively with SWPC and agreed to by them.
Testing has been fully documented.	This presentation, PLT reports, and PLPT reports.
Product is ready for operational use and for use in comprehensive cal/val activities and product optimization.	This data is not ready for operational use. This data is ready for further cal/val and product optimization.

# Summary and Recommendations

- All sensors are performing very well.
- Calibration LUTs have been updated. Further updates will occur.
- Observed issues are similar between GOES-16 and -17.
- Paths toward diagnoses and fixes of issues have been identified.
- Some issues will prevent Full status unless resolved.
- EUVS data should be embargoed until ADRs 898 and 471 are properly implemented.
- NCEI is working to create L0-processed scientific L1b EUVS data which can be released to the public when ready.

NCEI-CO does not recommend that the GOES-17 EUVS data be used for operations or provided to the public in its current state.

NCEI-CO does not recommend that EUVS L1b data be transitioned to Provisional status at this time.

# PATH TO FULL VALIDATION



# Path to Full Validation

- Data analysis with L1b, L2, and locally processed L0 data.
- Identify and resolve instrument issues including those listed in the Summary of Remaining Issues slides.
- Analyze daily, weekly and quarterly calibrations.
- Provide updated calibration tables.
- Verify L1b revisions for ADRs on Remaining GPA Issues slides.
- LASP is handing all GOES-16 and -17 calibration work over to NCEI on 1 January 2020.
- Proceed with L0 reprocessing at NCEI to provided scientific data for comparisons.
- Additional work to recalibrate ECI data for GOES-17.

# Risks for Full Validation Status

Issue	*	Notes
New issues found during continued monitoring	Possible	
Required ADR fixes need to be completed	Possible	

# AUXILLIARY INFORMATION

# EUVS LUT Filenames

On 2019-08-30 the following EUVS LUTs were in use:

## GOES-16

EUVSA\_Cal\_INR(FM1A\_CDRL79RevH\_PR\_08\_01\_01)-619067700.0.h5

EUVSB\_Cal\_INR(FM1A\_CDRL79RevH\_PR\_08\_01\_01)-619067700.0.h5

EUVSC\_Cal\_INR(FM1A\_CDRL79RevH\_PR\_08\_01\_01\_PROPASS\_Mod)-619067700.0.h5

EUVSPEC\_Cal\_INR(FM1A\_CDRL79RevH\_PR\_08\_01\_01)-619067700.0.h5

Yearly\_1AU\_Correction\_Table(2019)-599572800.0.h5

## GOES-17

EUVSA\_Cal\_INR(FM2A\_CDRL79RevF\_PR\_08\_01\_01)-619068400.0.h5

EUVSB\_Cal\_INR(FM2A\_CDRL79RevF\_PR\_08\_01\_01)-619068400.0.h5

EUVSC\_Cal\_INR(FM2A\_CDRL79RevF\_PR\_08\_01\_01\_PROPASS\_MOD)-619068400.0.h5

EUVSPEC\_Cal\_INR(FM2A\_CDRL79RevF\_PR\_08\_01\_01)-619068400.0.h5

Yearly\_1AU\_Correction\_Table(2019)-599572800.0.h5

# EXIS Calibrations

- Nominal Weekly - 90 s comparison with secondary
  - EUVS - A, -B Measure and trend darks and gain.
  - EUVS-A Measure and trend primary filter changes.
  - EUVS - A, -B, -C Measure and trend flatfield.
  - EUVS -C Measure and trend primary channel offset.
- Quarterly cruciform
  - XRS, EUVS-A, -B, -C Measure and trend FOV map
  - XRS, SPS Measure and trend internal gain, dark
- Quarterly other
  - XRS, EUVS-A, -B Measure radiation k factors
  - SPS Check for radiation sensitivity
  - EUVS-C Check radiation filtering, Mg II scaling.
  - XRS Find cross-over thresholds for A1-A2 and B1-B2. Check impact on ratios.
  - XRS Determine NOAA scaling, L1b uncertainties.
  - EUVS L1b model baseline and uncertainties.
  - EUVS Check for bootstrap relationships and degradations.
- Longterm comparisons
  - XRS compare flare locations from XRS and SUVI
  - XRS, EUVS compare measurements with other satellites